



SUPER MULTI-TASKING TURNING CENTER

SMX

2100/S/ST/B/SB/STB • 2600/S/ST • 3100/S/ST/L/LS



DN SOLUTIONS

SMX SERIES

The SMX series - Our next generation multi-tasking turning centers are high-productivity, high-precision machines that are easy to operate. By integrating the functionalities and capabilities of multiple machines into one system, the SMX series provides users with a multi-tasking machine tool solution that significantly reduces machining time and machining operations. The SMX series also delivers excellent high-precision machining; accuracy is assured by minimizing thermal deformation through the use of thermal compensation sensors and systems. Ergonomic design focused on operator convenience, and on efficient and effective maintenance provides the optimal solution that meets every customer's needs.





* This image contains several options.

HIGHER PRODUCTIVITY THROUGH POWERFUL MULTITASKING FUNCTIONS

- Complex machining capabilities of the left spindle, right spindle, B-axis, milling spindle and lower
- Highly-rigid machine construction using structural analysis design
- Maximized Y-axis stroke through machine's orthogonal design structure
- Maximized productivity achieved through simultaneous machining

ENHANCED PRECISION THROUGH HIGH ACCURACY CONTROL FUNCTIONS

- Minimized thermal deformation of the spindle and feed axis using oil cooler system
- A doption of roller LM guideways with high-rigidity and high precision
- Equipped with 0.0001° B-axis and C-axis accuracy control functions

EASY AND CONVENIENT OPERATION THROUGH AN ERGONOMIC DESIGN


- Front located tool magazine
- Side-to-side movable swiveling Operation panel with adjustable Height(SMX2100 : Swiveling & height adjustment possible)
- Convenient ATC-magazine operation panel

BASIC STRUCTURE

All units are combined in an orthogonal direction to create a highly rigid structure that is intuitive and stable for users, and guarantees stable performance under any processing conditions.

Robust design

FEM (Finite Element Method) analysis results in superior machine stability. All guideways are sealed with a protective covers, preventing high temperature chips and coolant from contacting the guideways, thus maintaining unsurpassed long-term accuracy.



Feed axis

Extended axis travels and improved rapid rates improve machining capacity and deliver excellent productivity. The X, Y and Z-axes move orthogonally to ensure high accuracy and repeatability.

Travel	Unit : mm(inch)			
Model	SMX 2100/S/ ST/B/ST/STB	SMX 2600/S, 3100/S	SMX 3100L/ LS	SMX 2600ST /3100ST
X-axis	630 (24.8)	630 (24.8)		695 (27.4)
Y-axis	210 (±105) (8.3 (±5.9))	300 (±150) (11.8 (±5.9))		
Z-axis	1085 (42.7)	1585 (62.4)	2585 (101.8)	1585 (62.4)
A-axis	1097 (43.2) ① 1075 (42.3) ②	1605 ① (63.2) 1562 ② (61.5)	2500 ① ② (98.4)	1538 ① (60.6)
B-axis	240 (±120) deg. (9.4 (±4.7))			
X2-axis	220 (8.7) (model : ST)	-		235 (9.3)
Z2-axis	1047 (41.2) (model : ST)	-		1540 (60.6)




① Right spindle ② Servo tail stock

High precision roller type LM guideways

Highly qualified roller type LM guideway realizes fine precision and fast speed, minimizing non-cutting time and re-machining work

Rapid traverse rate	Unit : m/min (ipm)			
Model	SMX 2100/S/ ST/B/ST/STB	SMX 2600/S, 3100/S	SMX 2600ST /3100ST	SMX 3100L/LS
X-axis		48 (1889.8)		
Y-axis		36 (1417.3)		
Z-axis		48 (1889.8)		30 (1181.1)
A-axis		30 ① (1181.1)		20 ① (787.4)
B-axis	40 r/min			
X2-axis	24 (944.9)	-	24 (944.9)	-
Z2-axis	36 (1417.3)	-	36 (1417.3)	-

① Right spindle (Servo tail stock is not applicable)

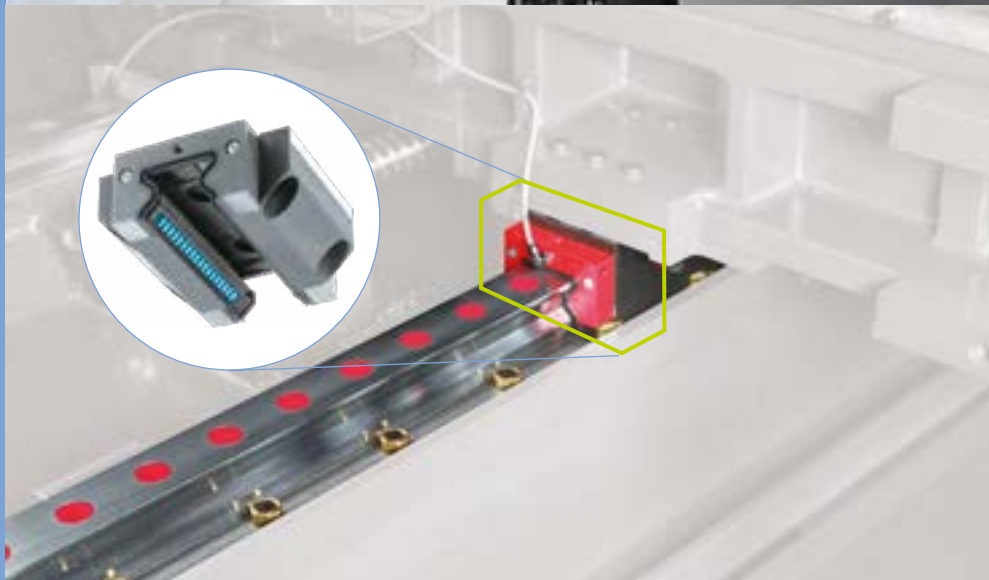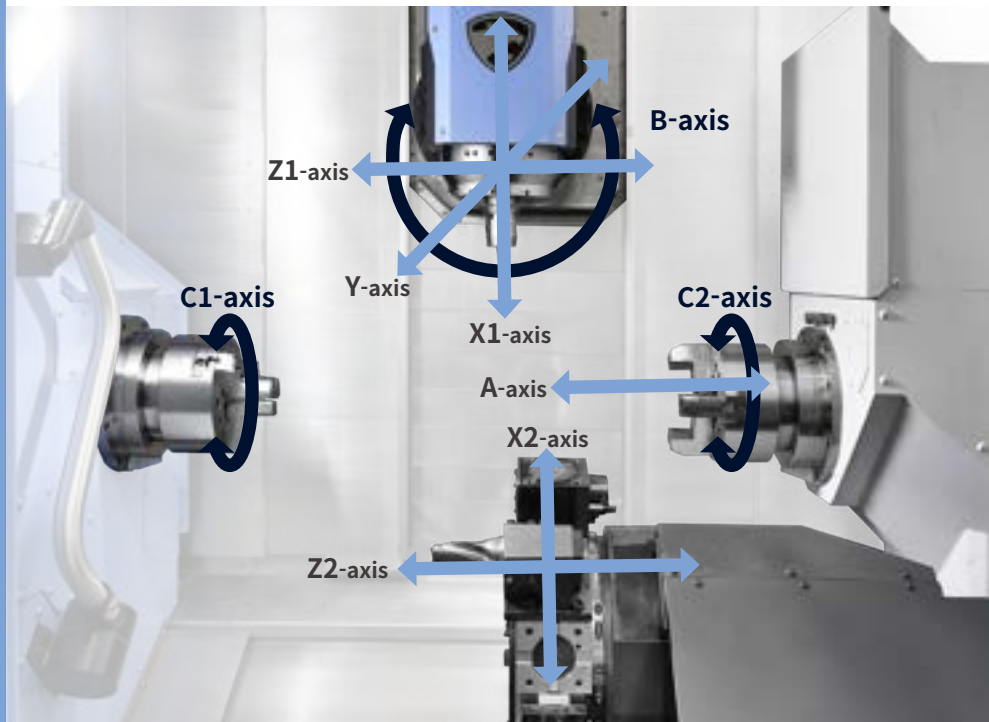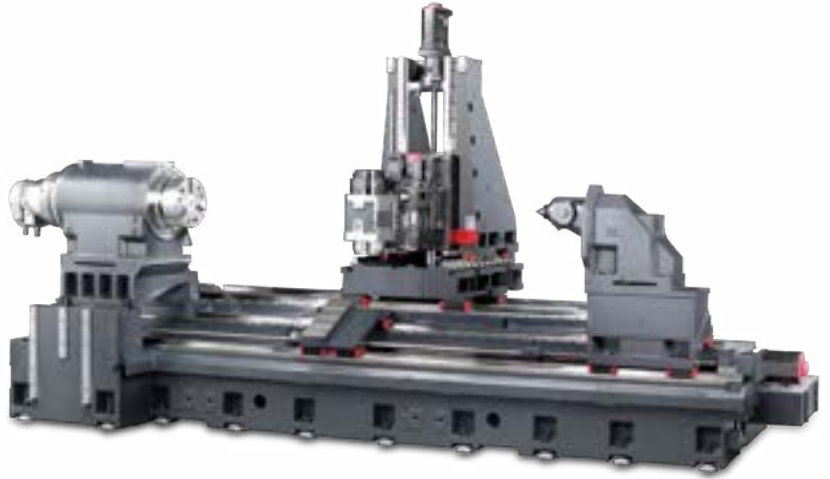


COOLING CONCEPT TO ACHIEVE HIGH ACCURACIES OVER LONG MACHINING RUNS

Machines have been designed and built to minimize thermal displacement and ensure superior accuracies over long machining runs and lengthy periods of operation.

Minimizing thermal deformation by oil cooling


A spindle and ballscrew core cooling system minimizes thermal deformation during long machining runs to achieve high-accuracy parts production.

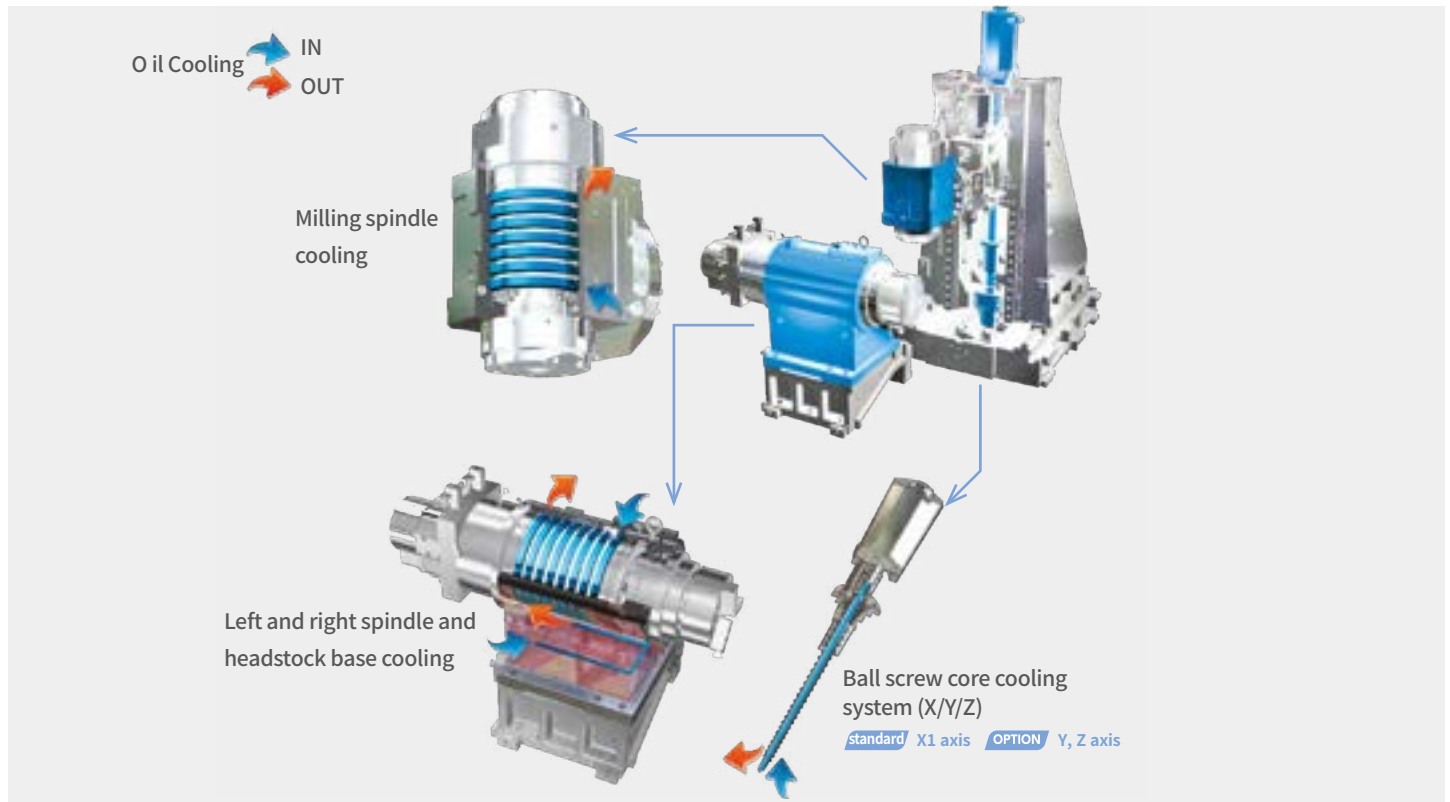

Circularity


By undertaking extensive testing of individual machine elements and analysing the results in detail, the SMX series achieves a high level of precision and reliability that exceeds customer expectations.

Turning (O.D. machining)

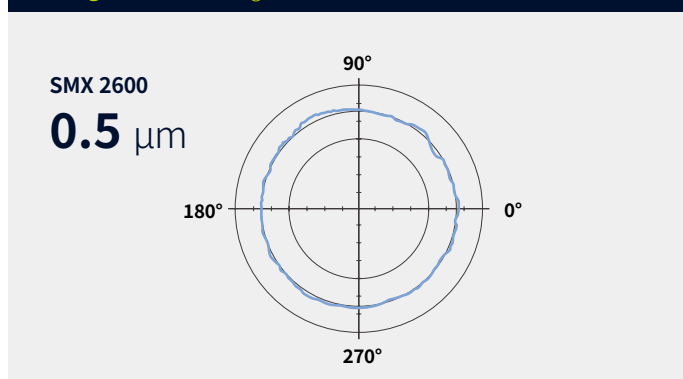

Material	Aluminium
Tool	Diamond tool (Nose radius 0.5 mm (0.02 in.))
Spindle speed	3000 r/min
Feedrate	0.5 mm/rev (0.02 ipr)

Milling (X-Y contouring)

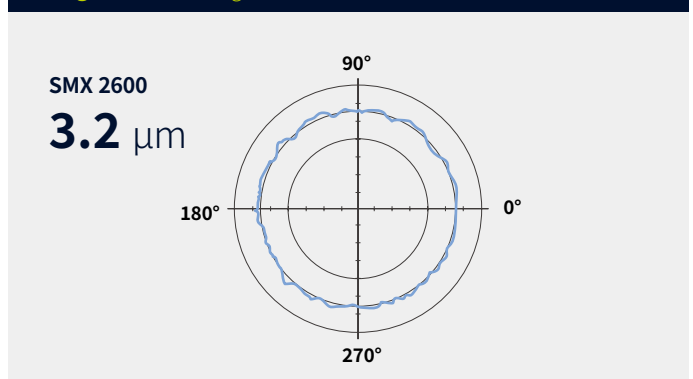

Material	Aluminium
Tool	End mill Ø20 mm (0.787 in.)
Spindle speed	8000 r/min
Feedrate	2500 mm/min (98.4 ipm)

* This test is performed under DN Solutions Machine Tool's test environment.

MACHINING AREA

An increased machining area, as a result of the SMX machines' orthogonal structure, and an extended turning diameter capability, enables the machining of large workpieces.

Maximized X-axis, Y-axis machining area through orthogonal structure design

Wide X-axis, Y-axis enables machining of parts of various sizes/shapes, making machining programming and set-up easier.

X-axis machining area

SMX 2100/B
630 mm 24.8 inch


SMX 2600/3100
630 mm 24.8 inch

SMX 2600ST/3100ST
695 mm 27.4 inch

Y-axis machining area

SMX 2100/B
210 mm
8.3 inch

SMX 2600/3100
300 mm
11.8 inch

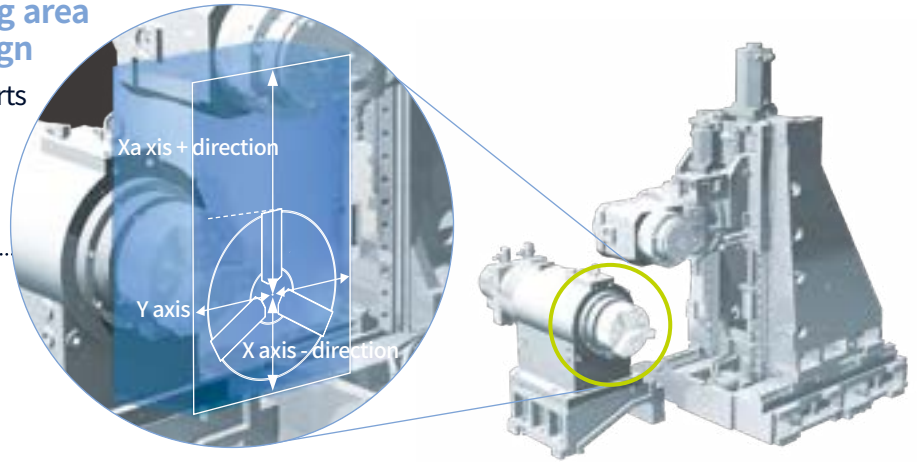

Yaxis : $\pm 105\text{mm}$ (SMX2100/B), $\pm 150\text{mm}$ (SMX2600/3100)
Xaxis +direction : 525mm(SMX2100/B), 505mm(SMX2600/3100), 570mm(SMX2600ST/3100ST)
Xaxis -direction : 105mm(SMX2100/B), 125mm(SMX2600/3100)

Extended machining area

Extended area enable various machining of large and long materials, and make it easy for users to access inside for set-up.

(A) Max. machining diameter

SMX 2100/B
600 mm
23.6 inch


SMX 2600/3100
660 mm
26.0 inch

(B)Max. machining length

SMX 2100/B
1040 mm
40.9 inch

SMX 2600/3100
1540 mm
60.6 inch

SMX 3100L
2540 mm
100.0 inch

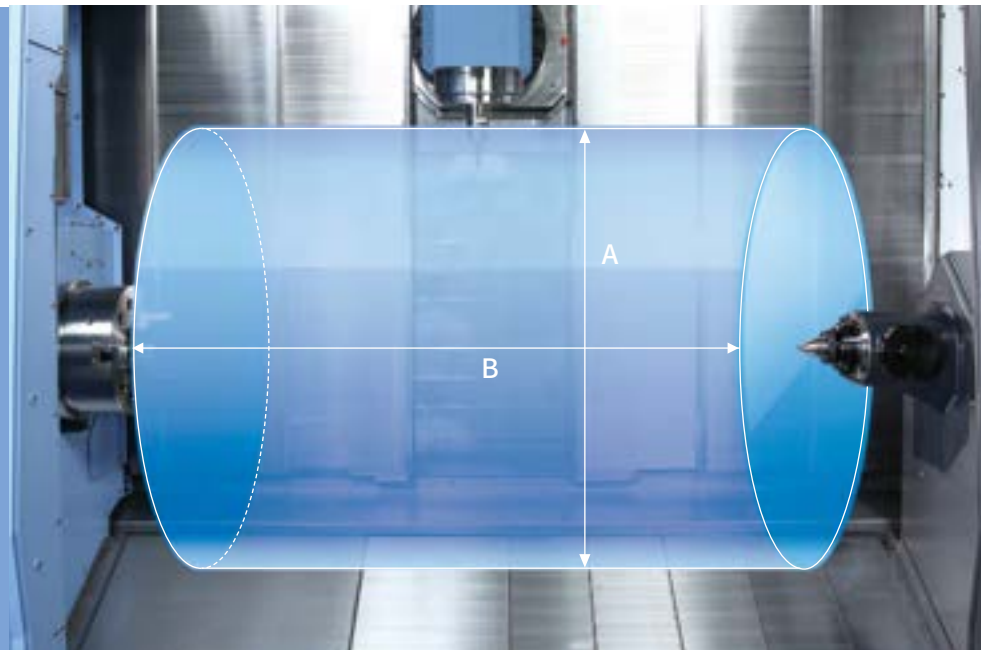


Large bar working diameter

SMX 2100
65 mm 2.6 inch

SMX 2100B / 2600
81 mm 3.2 inch

SMX 3100
102 mm 4.0 inch

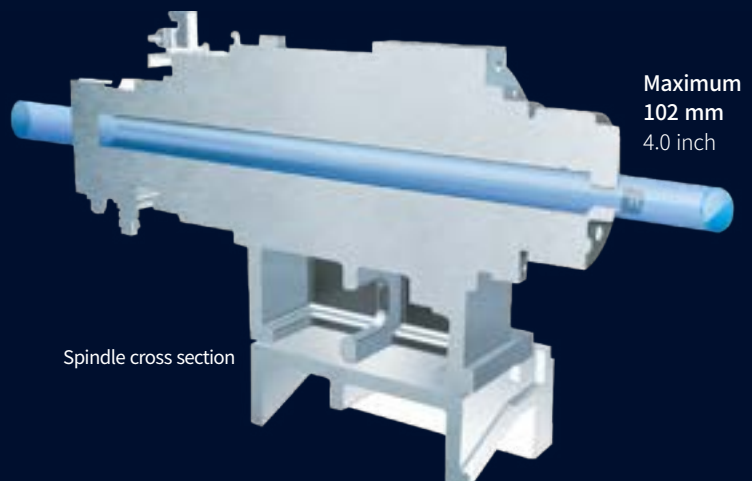

Spindle cross section

CUTTING PERFORMANCE

Powerful and fast machining capability across turning, milling, drilling, tapping and other multi-tasking operations ensures higher productivity and efficiency.

Powerful machining

O.D. cutting (SMX 3100)

Spindle speed r/min	Cutting speed m/min (ipm)	Feedrate mm/rev	Radial cutting depth mm (inch)	Material removal rate cm ³ /min (inch ³ /min)
253	210 (8267.7)	0.55 (0.0)	8.5 (0.3)	1405 (85.7)

U-drill (milling)

Tool mm (inch)	Spindle speed r/min	Feedrate mm/min (ipm)	Material removal rate cm ³ /min (inch ³ /min)
Ø63 (2.5)	1010	131 (5.2)	409 (25.0)

Face milling

Tool mm (inch)	Milling spindle speed r/min	Radial cutting depth mm (inch)	Feedrate mm/min (ipm)	Material removal rate cm ³ /min (inch ³ /min)
Ø80 (3.1)	1100	5 (0.2)	1117 (44.0)	357 (21.8)

End milling

Tool mm (inch)	Milling spindle speed r/min	Radial cutting depth mm (inch)	Feedrate mm/min (ipm)	Material removal rate cm ³ /min (inch ³ /min)
Ø25 (1.0)	382	25 (1.0)	200 (7.9)	125 (7.6)

Tapping

Tool mm (inch)	Milling spindle speed r/min	Feedrate mm/min (ipm)
M30 x P3.5 (M1.2 x P0.1)	212	742 (29.2)



* The results above are provided as examples only. Different cutting and environmental conditions may give different results.


Higher productivity through multi-tasking operation

Faster machining times compared to working with many conventional machines provides superior productivity and machining capability.



Reduced production lead time by

75 %

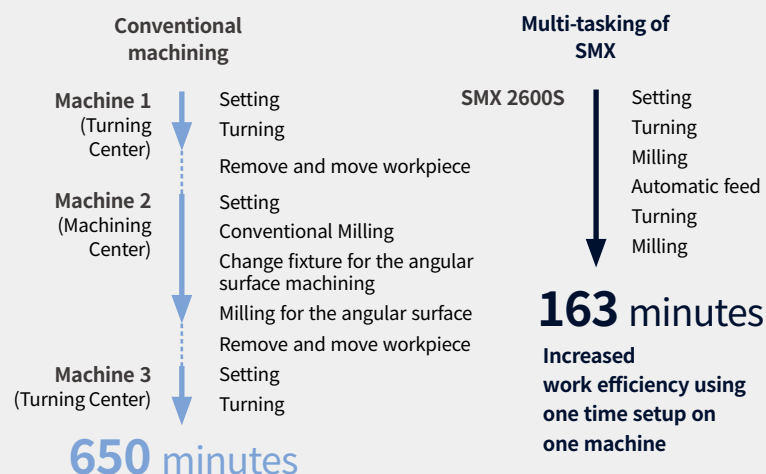

SPINDLE

Perfect combination of three high-performance spindles to ensure machining stability operating under various cutting conditions.

Milling spindle

12000 r/min

SMX 2100/B SMX 2600/3100
22 kW **26 kW**

Tool shank of milling spindle

CAPTO C6 {HSK-T63^{OPTION}}

Left spindle

SMX 2100

8 inch

SMX 2100B/2600

10 inch

SMX 3100

12 inch

Right spindle(S/ST/LS)

SMX 2100/B


8 inch

SMX 2600/3100

10 inch

Perfect combination of rotating spindles

Both left and right spindles are capable of high-accuracy C-axis operation and, with the milling spindle, can perform various machining functions like turning, milling and synchronized cutting in a single set up.

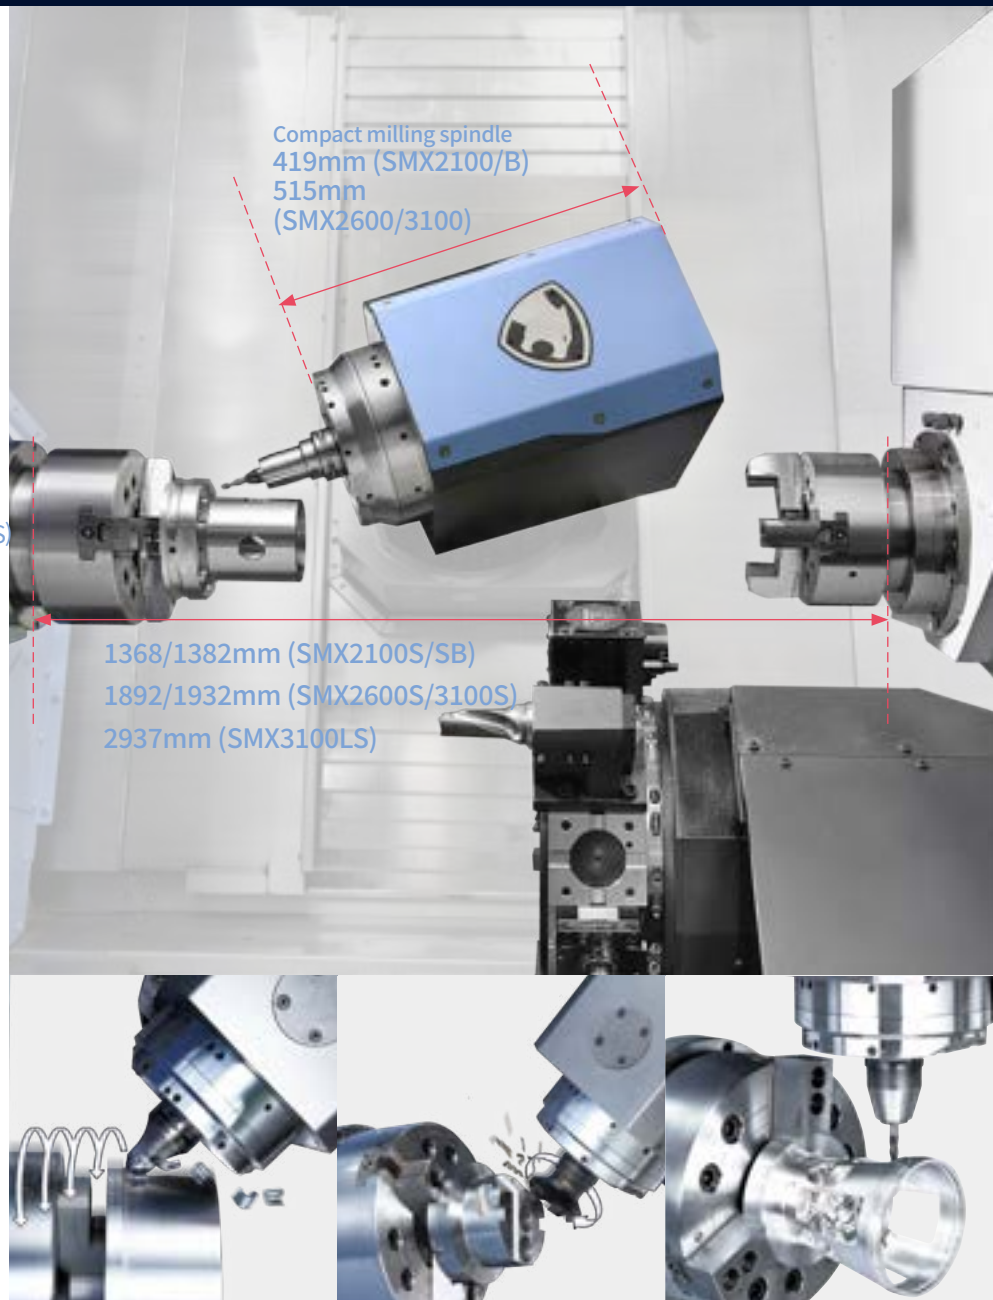


Model	Spindle	Standard Chuck inch	Spindle speed r/min	Power kW (Hp)	Torque N · m (ft·lbs)	Condition
SMX 2100 series	Left Spindle	8	5000	22/22/18.5/15 (29.5/29.5/24.8/20.1)	467 (344.6)	S3 15%/25%/30min/cont.
SMX 2100B series		10	4000	22/22/22/15 (29.5/29.5/29.5/20.1)	512 (377.9)	S3 15%/25%/15min/cont.
SMX 2600 series		10	4000	30/22 (34.9 / 29.5)	724 (516.6)	S3 25%/cont.
SMX 3100 series		12	3000	30/25 (40.2 / 33.5)	1204 (887.8)	30min/cont.
SMX 2100 S/ST/SB/STB	Right Spindle	8	5000	22/18.5/15 (29.5/24.8/20.1)	467	S3 15%/30min/cont.
SMX 2600S/ST, 3100S/LS/ST		10	4000	30/22 (34.9 / 29.5)	724 (516.6)	S3 25%/cont.

Torque	Spindle	Standard Chuck inch	Spindle speed r/min	Power kW (Hp)	Torque N · m (ft·lbs)	Condition
SMX 2100/2100B series	Milling Spindle	CAPTO C6	12000	22/22/18.5/15 (29.5/29.5/24.8/20.1)	84.3 (62.2)	S3 15%/25%/30min/cont.
SMX 2600/3100 series				26/18.5/15 (34.9 / 24.8 / 20.1)	124 (91.5)	2.5min/10min/cont.

SPINDLE | TAILSTOCK

High precision control of spindle axes (C & B-axis)

Machining operation is mainly done by the Left spindle and the Milling spindle. The C-axis of the left spindle and the B-axis of the milling spindle, with Y-axis control, facilitates multi-tasking operations i.e. drilling, tapping and end milling at any angle. It also enables the machining of precise angles and sculpted contours via 5-axis simultaneous machining.

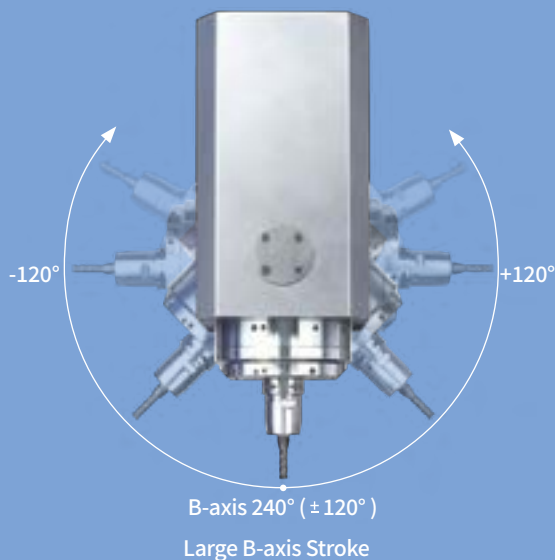

Left spindle



C-axis positioning control

To enhance C-axis positional accuracy of the left spindle, a positioning compensation sensor has been used. The left spindle can have C-axis positioning control every 0.0001° increment over 360°.

B-axis positioning control - precise continuous indexing

High-accuracy B-axis indexing (every 0.0001° over $\pm 120^\circ$) delivers outstanding positioning accuracy and enables a range of machining operations to be undertaken - from horizontal front face machining to angular machining.

Braking index at a random angle

Within its $\pm 120^\circ$ range, the B-axis can be indexed and braked precisely at a random angle.



Swivelling and indexing of the B-axis is achieved by a servo motor and a roller gear cam operating with high-rigidity and high-precision.

Tailstock

Easier and faster set-up of the tailstock using M-code programming (control servo motor and ballscrew).

Servo-driven tailstock

The servo-driven tailstock makes set-ups faster and easier to complete. The operator inputs the proper M-code information into the control and the tailstock moves to its correct position automatically, by linear motion control of the servo motor and ballscrew. No manual adjustments are required.

Model	Tail stock travel mm (inch)	Max. quill thrust force kN	Tail stock center
SMX 2100/B	1075 (42.3)	7	Built-in type dead center, MT#4
SMX 2600/3100	1562 (61.5)	10	Built-in type dead center, MT#5
SMX 3100L	2500 (98.4)	15	

AUTOMATIC TOOL CHANGER

The servo-driven ATC and servo tool magazine ensures fast and reliable tool indexing.

Tool storage

40{80/120^{OPTION}} tools

Max. tool length (from gauge line)

SMX 2100/B

300 mm
11.8 inch

SMX 2600/3100

450 mm
17.7 inch

Max. tool weight

12 kg
26.5 lb

Max. tool moment

9.8 N·m
7.2 ft-lbs

Max. tool diameter (continuous)

90 mm
3.5 inch

Max. tool diameter (adjacent pots are empty)


130 mm
5.1 inch

Enlarged touchscreen panel is available as an option

7{10.4^{OPTION}} inch


Servo-driven ATC and tool magazine

The tool magazine capacity can be increased to 120 tools. Tools are selected by the fixed address method that helps reduce changeover times.

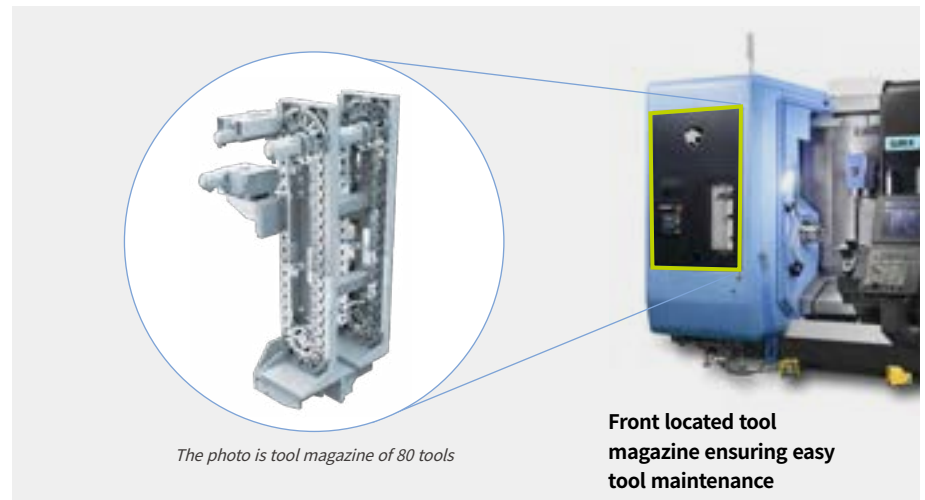

ATC operation panel

The status of the ATC and the tool magazine can be viewed on a separate touchscreen. The touchscreen is used to operate the ATC, the tool magazine and the tool pot carrier.

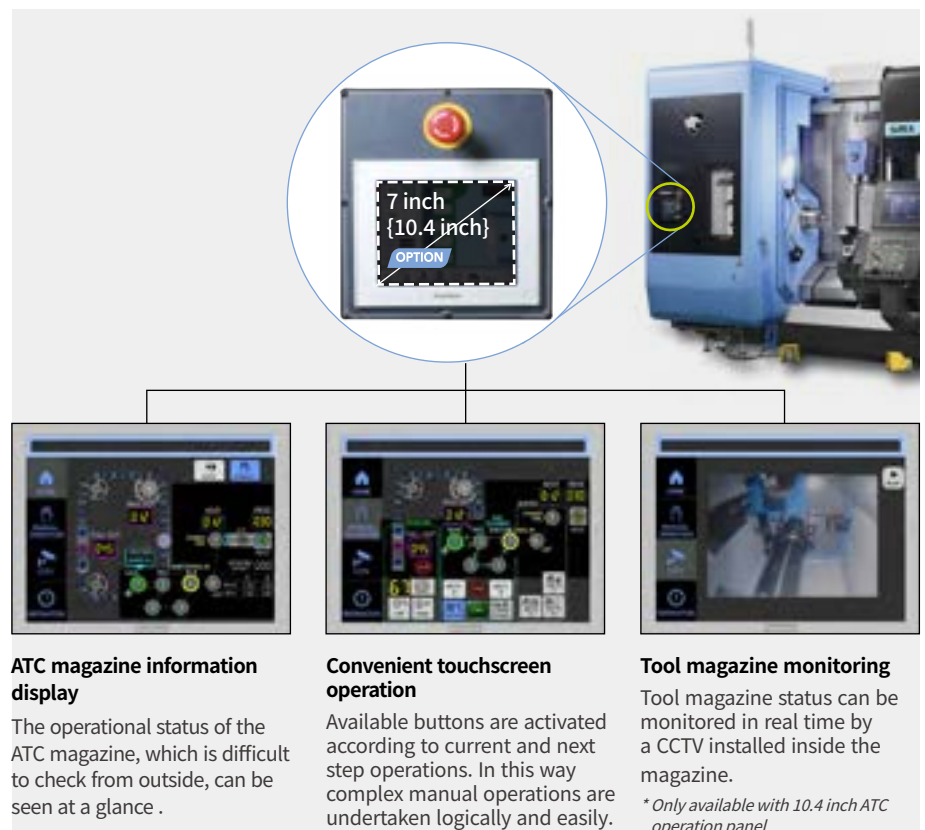

ADDITIONAL TOOL MAGAZINE

As an option, just for SMX 3100L/LS, a long boring bar magazine is available for machining long parts (i.e. tubes, valves etc.).

Max. tool size

Ø60 x L600 mm
Ø 2.4 x L 23.6 inch

Max. weight

15 kg
33.1 lb

Max. tool size

Ø30 x L800 mm ②
Ø 2.4 x L 31.5 inch

Max. weight

15 kg
33.1 lb

Tool magazine for long boring bar OPTION SMX 3100L / LS

SMX 3100L/LS can be equipped with a long boring bar magazine as an option.



Tool storage

3 tools ①

SMX 3100L/LS can accommodate workpieces up to 2540mm between centers. The machine can process long tubes such as landing gear axles requiring a center bore. Because the automatic Tool changer on this model cannot handle a long boring bar, the separate tool magazine, just for these tools, has 3 tool stations for tools up to 600mm.

- ① Customers can select a tool storage capacity of 2+1 tools instead of 3 tools. The 2+1 storage means 2 tools of Ø60 x L600 mm or Ø30 x L800 mm and 1 large diameter tool, Ø190 x L200 mm, can be mounted in the long boring bar magazine.
- ② A Ø30 x L800 mm sized tool is not classed as a long boring bar but a Gun drill. We do not recommend long boring bar sizes of Ø30 x L800 mm.



Rigid servo-driven lower turret

(SMX 2100ST/STB/ 2600ST/3100ST)

Turret rotation, acceleration/ deceleration and the large diameter curvic coupling are all controlled by a high-torque servo-motor. Unclamping and rotation are virtually simultaneous. Fast indexing helps keep cycle times short.

Number of tool stations

SMX 2100ST/STB

OPTION

12 ea, 24st. Indexing

SMX 2600ST/3100ST

12 ea

Tool holder type OPTION

SMX 2100ST/STB

BMT 55P

SMX 2600ST/3100ST

BMT 65P

Max. rotary tool speed



5000 r/min OPTION

10000 r/min OPTION

*10000 r/min : available on only SMX2100ST/STB

Various applications for the lower turret

- Case1) OPTION Steady rest on lower turret
- Case2) OPTION Tailstock on lower turret application for long part machining

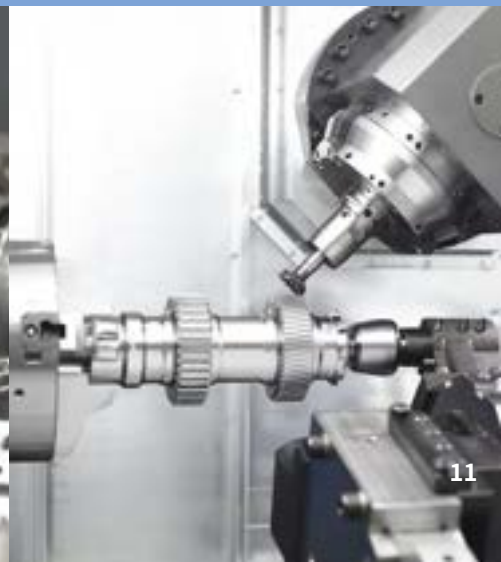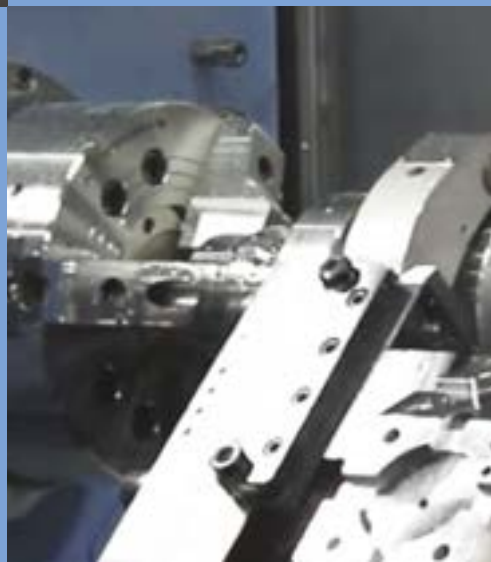


APPLICATION PERFORMANCE

Multi-tasking, which is performing more than one duty at a time, can deliver up to a 40% increase in productivity and can have a positive impact on your company's bottom line.

Benefits of multi-tasking

Using a single set up, one machine is capable of performing all machining processes that generally require two, three or even more machines to complete. By minimizing time and labor, the process cost is reduced and lead times are shortened by up to 75%. This provides a significant advantage when undertaking high mix : low volume manufacturing.

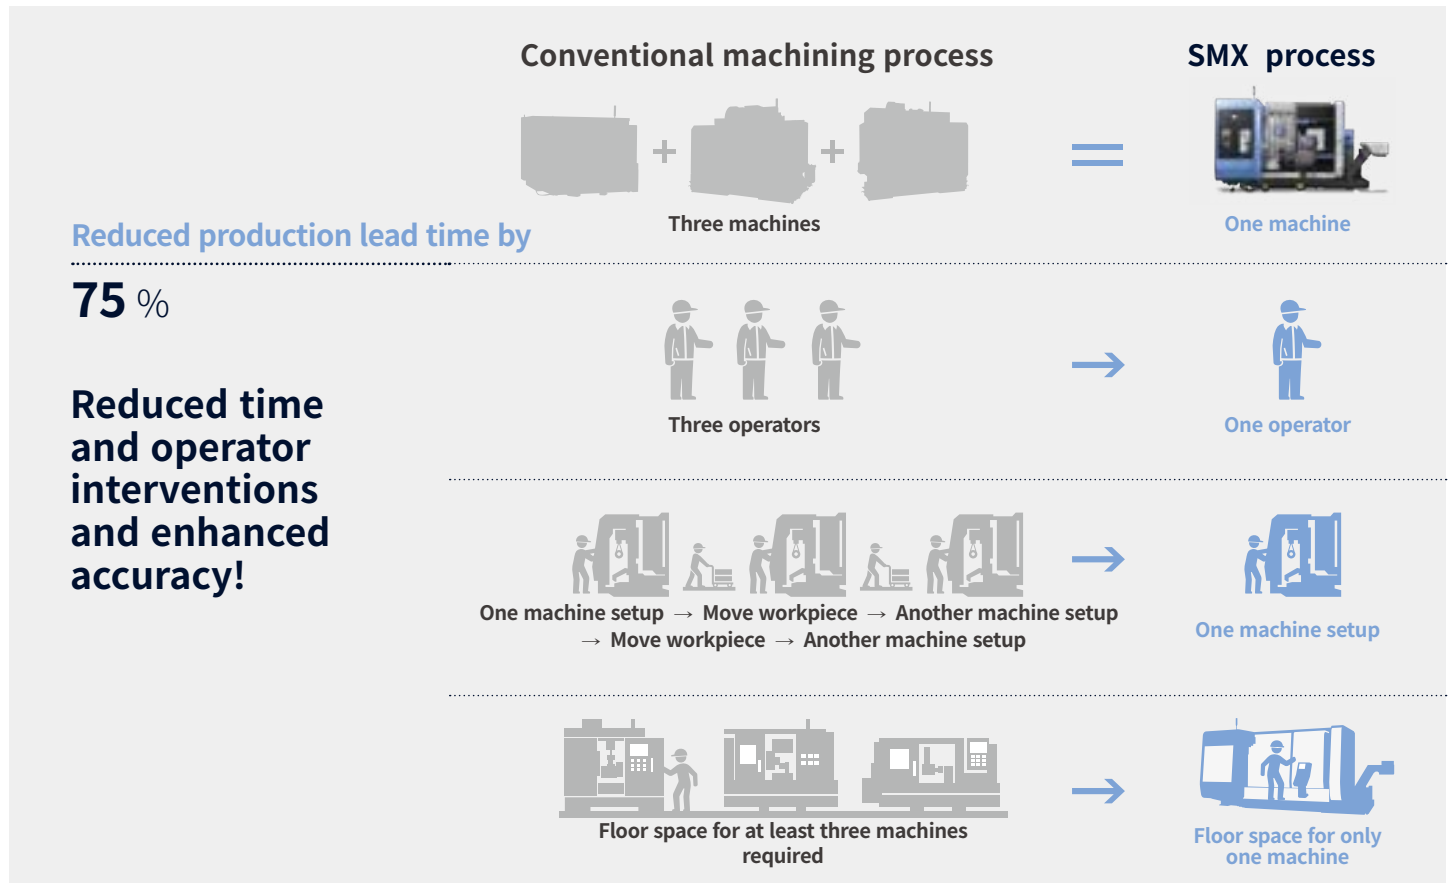


Providing complex 5-axis machining capabilities (Standard with FANUC 31i-5 control)

Simultaneous 5-axis machining functions such as TCP* are built-in, making the machining of complex shapes (i.e. automotive engine impellers or aero-engine blades), much easier and faster to produce.


Smooth tool center point control

- Facilitating the high precision machining of a surface by automatic control of the tool path
- Reducing the time required for setups and for completion of the machining process

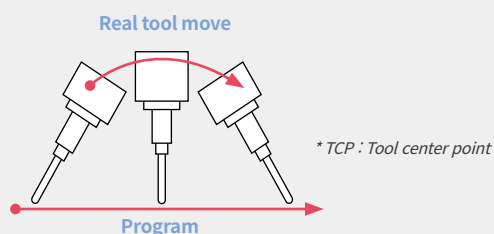

Cutting point command OPTION


- Increasing productivity by automatically making all necessary compensations when using various tool tips without having to change the machining program
- Performing effective tool correction

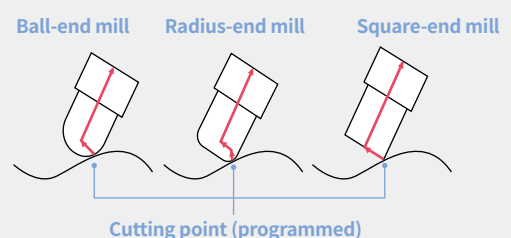


Various applications

Just one machine! The SMX series can satisfy all your machining requirements. Investing in SMX machine seriously boosts your production capabilities and dramatically improves your performance.


Turning




O.D. cutting



U-Drilling




I.D. cutting




I.D. threading


Milling




O.D. milling



O.D. hole machining




Ball-end milling




Angular machining


Right spindle




Parting off



Face cutting



Angular machining



End face hole machining and tapping

Typical applications - 1

A wide range of applications requiring high-performance machining

The sophisticated machining capabilities of SMX machines enable a wide range of applications, across various industries, to be machined to high precision. Specific industries include - aerospace, energy, shipbuilding, medical, etc.



Drill bits

Industry | Energy
Size | D165 X L175
Material | Stainless steel
Tools | 15



Shaft

Industry | Energy
Size | D150 X L350
Material | Aluminum
Tools | 14



Die roller

Industry | Medical
Size | D185 X L330
Material | Aluminum
Tools | 9



Valve

Industry | General
Size | D300 X L450
Material | Stainless steel
Tools | 6

Typical applications - 2

A wide range of applications requiring high-precision machining

Stable control technology and excellent levels of accuracy enable delicate and detailed workpieces to be machined to high precision.



Housing

Industry | General
Size | D150 X L300
Material | Aluminum
Tools | 6



Impeller

Industry | Aerospace
Size | D120 X L80
Material | Aluminum
Tools | 6



Barrel

Industry | Electronics
Size | D70 X L50
Material | Aluminum
Tools | 50



Bucket Blade

Industry | Energy
Size | 85t x D120 x L600
Material | Stainless steel
Tools | 8


ERGONOMIC DESIGN

Ease-of-use and operator convenience - all part of the machines' ergonomic design.

Ease of machine setup

By laying out the operation panel and tool magazine in a user-friendly way, tooling and workpiece setup becomes more efficient.

Award

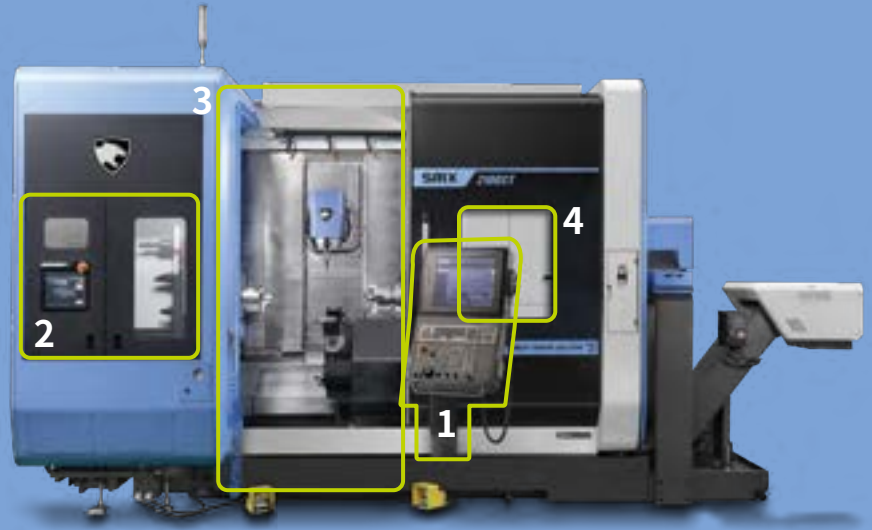

1 Operation panel with side-to-side movement, swivel action and adjustable height setting

Model	Swivel angel adjustment	Height adjustment	Left/Right movement
SMX2100/2100B	0~100°	0~150mm (0~5.9inch)	panel stand rotating (50°)
SMX2600/3100	0~100°	0~190mm (0~7.5inch)	1350mm (53.1inch)

2 Convenient front located tool magazine layout, ATC operation panel

Easy tool loading, managing and monitoring with touch screen.

3 Low-height bed cover structure for easy internal access

Fast and convenient setup and maintenance through improved ergonomic accessibility .

4 Extended front window

Enables the operator to easily monitor the machining process.



Safety design to reduce collision-caused damage

Machine airbag function

The machine airbag minimizes damage in the event of a machine collision. Sudden changes in axis loads etc., are detected and will trigger the airbag's deployment.

The principle behind the machine airbag function



CUSTOMIZED USER-FRIENDLY FLEXIBLE OPERATION SOLUTIONS

CUFOS is a PC based control system created by DN Solutions. equipped with intuitive user-friendly functions such as a smart phone screen and easy customization, CUFOS helps to improve operational efficiency and performance for the user.

CUFOS FEATURES

19 INCH TOUCHSCREEN

- Program memory : 2GB (40GB OPTION)
- App-based Interface like smart phone, tablet PC

EASY PROGRAMMING

- Sketch cycle : Gear skiving, Gear hobbing, Polygon turning (continuously being added...)
- SSD data server : Program file sharing/ managing (CF card/USB/External PC)

EASY SET-UP/OPERATION

- Tool management for SMX
- CPS(collision protection system)
- Manual viewer
- File manager & PDF viewer

EASY MAINTENANCE

- Status monitor
- Alarm guidance
- Maintenance manager



CUFOS

for SMX ser.


SKETCH CYCLE

Easy and quick, but powerful programming for complex machining

Sketch cycle is easy-to-use conversational programming software that make a support to code complex shapes and machining processes such as gear skiving, hobbing and polygon turning.


Advantages

- Easy to use even for beginners with conversational programming by advising workpiece shapes, tool information and machining conditions
- Expensive CAM software is not required
- Reduce coding time by up to 70% while minimizing trial and errors
- Enable to utilize the recent high productivity processing program such as gear skiving






Gear skiving

Gear skiving is carried out in 5 axis machines for more flexible and productive gear machining. The complete component can be finished in one machine, which shorten production time and reduce handling and logistics cost.




Gear hobbing

Gear hobbing make it easy to proceed gear machining with general turning centers. Gear machining programs can be created by the simple conversational programming so program coding and set-up time can be saved dramatically.

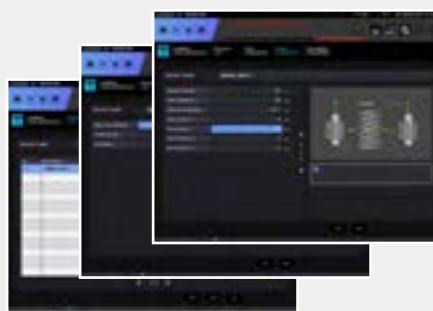

Polygon turning

Polygon turning is a machining process which allows noncircular forms (polygons) to be machine turned without interrupting the rotation of workpieces. It allows rapid production and clean machining of advanced geometries.

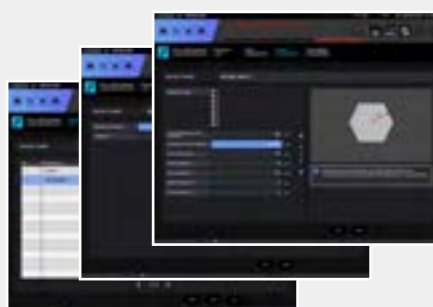

EASY SET-UP | OPERATION

Tool management, collision protection between machine unit/ workpiece/tooling and various user guidance provide higher productivity and user-convenience.



Tool management

DN Solutions EZ work tool management




Includes a summary monitoring screen and gives the operator easy access to DN Solutions's own tool management system which provides comprehensive real time data on each tool, such as remaining tool life and status of tool groups.



CPS (Collision protection system)

A function to prevent real-time collision between the tool and equipment / machine elements inside the working area.

Use the setup manager with the CPS app to build up the machine model, and add tool, workpiece and workholding equipment details.

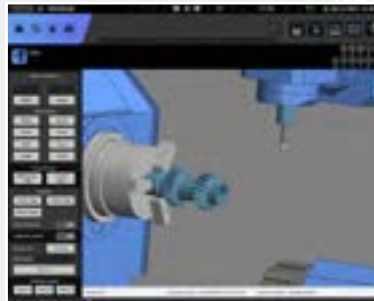

File Manager & PDF viewer

Ability to transfer various type of files including CF cards, USB memory, external PCs and memory inside CUFOS, NC programs between NC memory.

PDF drawings can be directly open on the screen via PDF viewer



EASY MAINTENANCE

Keeping a machine in best condition through status monitoring, alarm guidance and maintenance manager functions.



Status monitoring

Monitoring various information such as spindle, milling spindle, feed axis, cycle time, program/tool no. on one screen.




Alarm guidance

Presenting an operator alarm's causes and troubleshooting guides and sending an email when the alarm last for a long time.



Maintenance manager

Monitors the status of machine and control elements, and confirms the alarm condition and maintenance schedule for preventative maintenance.

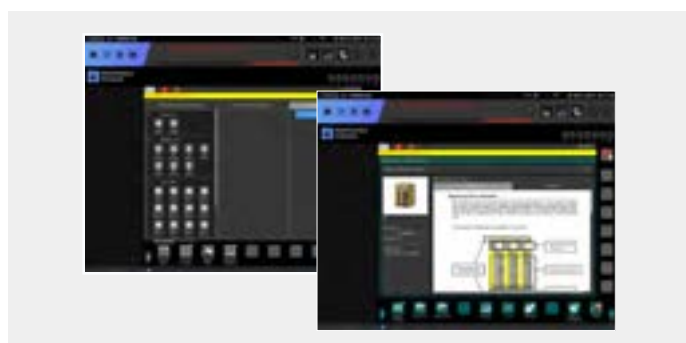

CUFOS: STANDARD | OPTIONAL SPECS

A diverse range of functions and apps are available to meet your needs.

Description	Features		PUMA SMX series
Hardware	Display Unit	19" Color LCD Screen	●
	Main RAM Memory	4GB	●
	Program Storage Memory	5GB	●
		20GB	○
		40GB	○
	2 point-touch panel port		●
	Windows 7 operating system		●
Applications	DN Solutions Tool Management		○
	CPS(Collision Protection System)		○
	SSD Data server application		○
	Set and Inspection Application(Renishaw)		○
	Manager's Message Notification application		●
	FTP Server service		●
	Smart key access control application		○
	Memo Application		●
	Machine status Monitor application		●
	Alarm guidance application		●
	Sketch Cycle		○
	BLUM Contour Scan(BLUM)		○
	Alarm Notification via email		●
	Manual viewer application		●
iHMI Basic Application	Calendar application		●
	Browser application		●
	Periodic Maintenance Application		●
	Data Logger application		●
	Servo viewer application		●

● Standard ○ Optional

FANUC 31i/32i PLUS

FANUC 31i/32i PLUS maximizes customer productivity and convenience.

15" Touch screen + New OP

DN Solutions Fanuc 31iB/B5 Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout. It features a Qwerty keyboard for fast and easy data input and operation.

Fanuc 31i/32i Plus

- 15-inch color display
- Intuitive and user-friendly design

USB and PCMCIA card QWERTY keyboard

- EZ-Guide i standard
- Ergonomic operator panel
- 4MB Memory
- Hot keys
- Enhance AICC BLOCK
- Touch pen provided as standard



iHMI touchscreen

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.



NUMERIC CONTROL SPECIFICATIONS

FANUC

Description	Item	Specifications	SMX2100(L), 2600, 3100(L) Fanuc 31i Plus	SMX2100(L)S, 2600S, 3100(L)S Fanuc 31i Plus	SMX2100(L)ST, 2600ST, 3100ST Fanuc 31i Plus	SMX2100(L), 2600, 3100(L) Fanuc 31i-5 Plus	SMX2100(L)S, 2600S, 3100(L)S Fanuc 31i-5 Plus	SMX2100(L)ST, 2600ST, 3100ST Fanuc 31i-5 Plus
Controlled axis	Controlled axes	Note *1) {Z2} could be supplied as Servo Steady Rest option except for T/ST type.	7 (X, Z, C, B, Y, A, {Z2})	8 (X, Z, C1, B, Y, C2, A, {Z2})	9 (X1, Z1, C1, B, Y, X2, Z2, C2, A)	7 (X, Z, C, B, Y, A, {Z2})	8 (X, Z, C1, B, Y, C2, A, {Z2})	9 (X1, Z1, C1, B, Y, X2, Z2, C2, A)
	Simultaneously controlled axes		4 axes(Upper X, Z, C, Y) + 1 axes(Lower {Z2})	4 axes(Upper X, Z, C1, Y) + 3 axes(Lower {Z2}, C2, A)	4 axes(Upper X1, Z1, C1, Y) + 4 axes(Lower X2, Z2, C2, A)	5 axes(Upper X, Z, C, B, Y) + 1 axes(Lower {Z2})	5 axes(Upper X, Z, C1, B, Y) + 3 axes(Lower {Z2}, C2, A)	5 axes(Upper X1, Z1, C1, B, Y) + 4 axes(Lower X2, Z2, C2, A)
Data input/output	Fast data server		○	○	○	○	○	○
	Memory card input/output		●	●	●	●	●	●
	USB memory input/output		●	●	●	●	●	●
	Larger capacity memory_2GB	not CUFOS only (15" display)	○	○	○	○	○	○
Interface function	SSD data server	CUFOS only (19" display)	○	○	○	○	○	○
	Embedded Ethernet		●	●	●	●	●	●
	Fast Ethernet		○	○	○	○	○	○
	Enhanced Embedded Ethernet function		●	●	●	●	●	●
Operation	DNC operation	Included in RS232C interface.	●	●	●	●	●	●
	DNC operation with memory card	G5.1 Q_, 600 Blocks	●	●	●	●	●	●
Feed function	AI contour control II							
	AI contour control II	G5.1 Q_, 1000 Blocks	●	●	●	●	●	●
Operation Guidance Function	High-speed smooth TCP		X	X	X	●	●	●
	EZ Guide i (Conversational Programming Solution)		●	●	●	●	●	●
	iHMI with Machining Cycle		●	●	●	●	●	●
Setting and display	EZ Operation package		●	●	●	●	●	●
	CNC screen dual display function		●	●	●	●	●	●
Network	FANUC MTConnect		✳	✳	✳	✳	✳	✳
	FANUC OPC UA		✳	✳	✳	✳	✳	✳
Others	Display unit (Note *2)	15" color LCD with Touch Panel	✳	✳	✳	✳	✳	✳
		19" color LCD with Touch Panel	✳	✳	✳	✳	✳	✳
		1280M(512KB)_1000 programs	X	X	X	X	X	X
		2560M(1MB)_1000 programs	X	X	X	X	X	X
		5120M(2MB)_1000 programs	X	X	X	X	X	X
		10240M(4MB)_1000 programs	●	●	●	●	●	●
		20480M(8MB)_1000 programs	○	○	○	○	○	○
		10240M(4MB)_4000 programs	○	○	○	○	○	○
		20480M(8MB)_4000 programs	○	○	○	○	○	○

Note *2) CUFOS specification have 19" color LCD with Touch Panel

● Standard ○ Optional X N/A ✳ Available

CONVENIENT OPERATION

FANUC 31i/32i PLUS

EZ WORK function

Tool load monitoring, Setup guide, Status monitoring, Operation and Recovery guide can provide more convenience and efficiency increasing for user operation.



Tool load monitoring

Real-time tool load monitoring and display various tooling information.



Operation and Recovery guide

Provides step-by-step operation guides and help so even unskilled users can operate it safely and easily.



Thermal Compensation

Improve the machining precision through temperature sensor detection and deflection compensation of the structure in real-time.



Status monitoring

Real-time confirmation of machine operation abnormality for effective maintenance using actuator/sensor base operation status notifications.



Setup guide

Displays the operation status up to now and guides the next step when setting up the machine.



CONVENIENT OPERATION

SIEMENS 840D

21.5 inch display + New OP

Two path programs are displayed simultaneously in the large 21.5-inch screen for enhanced user convenience.

• 21.5-inch display

- 6GB user memory
- USB (standard)
- QWERTY keyboard



Convenient conversational functionality



Shopmill / Shopturn



Tool load monitoring



Measuring cycle



Intelligent kinematic compensation function



Temperature compensation function



Collision avoidance function

NUMERIC CONTROL SPECIFICATIONS

SIEMENS

Description	Item	Specifications	STD S840D	S S840D	ST S840D
			X1, Z1, Y1, B1, C1, C3, W1, MG1, MG2, ARM,SH	X1, Z1, Z3, Y1, B1, C1, C2, C3, W1, MG1, MG2, ARM,SH	X1, X2, Z1, Z2, Z3, Y1, B1, C1, C2, C3, C4, MG1, MG2, MG3, ARM,SH
Controlled axis	Controlled axes				
	Simultaneously controlled axes		5 axes	5 axes	5 axes
Data input/ output	Memory card input/output		X	X	X
	USB memory input/output		●	●	●
Interface function	Ethernet	(X130)	●	●	●
	On network drive	(without EES option, Extcall)	●	●	●
Operation	On USB storage medium, e.g. memory stick	(without EES option, Extcall)	●	●	●
	Workpiece coordinate system	G54 - G59, G507 - G599	●	●	●
Feed function	Advanced surface		●	●	●
	Top surface		○	○	○
Programming & editing function	Look ahead number of block		1000	1000	1000
	3D simulation, finished part		●	●	●
Operation guidance function	Simultaneous recording		●	●	●
	DXF reader for pC integrated in SINUMERIK operate		○	○	○
Setting and display	Shopturn		●	●	●
	EZ operation package		●	●	●
Network	Operation via a VNC viewer		●	●	●
	MTConnect		✳	✳	✳
Others	OPCUA		○	○	○
	Display unit	19" color display without touch screen(SW4.9)	X	X	X
	Part program storage size	21.5" color display with touch screen(SW4.9)	●	●	●
		CNC user memory 10 MB	●	●	●
		CNC user memory 100 MB	○	○	○
		CNC user memory 6GB	○	○	○
		CNC user memory 40GB (with PCU or IPC)	○	○	○
		CNC user memory without limit (Execution from external storage devices) (EES / Using by USB or network)	○	○	○
		HMI user memory for CNC part program 6GB	●	●	●

● Standard ○ Optional X Not applicable ✳ Available

STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Specifications	SMX2100	SMX2100S	SMX2100ST	SMX2100B	SMX2100SB	SMX2100STB
Tool shank	CAPTO C6	●	●	●	●	●	●
	HSK-A63	consultation	consultation	consultation	consultation	consultation	consultation
Automatic tool changer	7" operation touch panel	●	●	●	●	●	●
	10.4" operation touch panel (including a camera in the magazine)	○	○	○	○	○	○
Tool magazine	40 tools	●	●	●	●	●	●
	80 tools	○	○	○	○	○	○
	120 tools	○	○	○	○	○	○
Low turret	12 stations turning	●	●	●	●	●	●
	12 stations turn-milling (BMT55P, 5000 r/min)	○	○	○	○	○	○
	12 stations turn-milling (BMT55P, 10000 r/min)	○	○	○	○	○	○
	12 stations /24 Positioning turn-milling (BMT55P, 5000 r/min)	○	○	○	○	○	○
	12 stations/24 Positioning turn-milling(BMT55P, 10000 r/min)	○	○	○	○	○	○
Work holding device	Left spindle Hydraulic chuck 8"	●	●	●	X	X	X
	Hydraulic chuck 10"	○	○	○	●	●	●
	Hydraulic chuck 12"	X	X	X	○	○	○
	Right spindle Hydraulic chuck 8"	X	●	●	X	●	●
	Hydraulic chuck 10"	X	○	○	X	○	○
	Hydraulic chuck 12"	X	X	X	X	X	X
	Dual pressure chucking (High pressure / Low pressure)	○	○	○	○	○	○
	Chuck clamp & Unclamp confirmation	●	●	●	●	●	●
	Servo driven steady rest	○	○	X	○	○	X
	V stand for sha workpiece	○	○	○	○	○	○
Coolant	Pressure 1.0MPa (145 psi)/ Bag filter	●	●	●	●	●	●
	Pressure 3.0MPa (435 psi)/Cyclone filter	○	○	○	○	○	○
	Pressure 7.0MPa (1015 psi) / Cyclone filter	○	○	○	○	○	○
	Pressure 7.0MPa (1015 psi)/Paper filter	○	○	○	○	○	○
	MQL (Minimum quantity lubrication) system	○	○	○	○	○	○
	For Lower turret Pressure 0.45MPa (65.2psi) / Tank screen filter	X	X	●	X	X	●
	Pressure 0.7 / 1.0 / 1.45 Mpa(101.5/145/151.1 psi) / Tank screen filter	X	X	○	X	X	○
	Oil skimmer	○	○	○	○	○	○
	Coolant pressure switch (Standard for milling spindle / option for lower turret)	●	●	● (lower turret : ○)	●	●	● (lower turret : ○)
	Lower turret coolant filter	X	X	○	X	X	○
	Coolant level switch : Sensing level - Low	○	○	○	○	○	○
Chip disposal	Chip conveyor (Right disposal)	○	○	○	○	○	○
	Chip bucket	○	○	○	○	○	○
	Air blower (for Left or Right spindle chuck)	●	●	●	●	●	●
	Chuck coolant (for Left or Right spindle chuck)	○	○	○	○	○	○
	Through spindle air shower (Left or Right)	○	○	○	○	○	○
	Through spindle coolant (Left or Right)	○	○	○	○	○	○
	Shower coolant (0.75kW, 85 liter/min)	○	○	○	○	○	○
	Coolant gun	○	○	○	○	○	○
	Air gun	○	○	○	○	○	○
	Mist collector	○	○	○	○	○	○
High accuracy	Thermal compensation	●	●	●	●	●	●
	Ball screw core cooling (X-axis)	●	●	●	●	●	●
	Ball screw core cooling (Y/Z-axis)	○	○	○	○	○	○
	Coolant chiller (Coolant Chiller, Temperature control)	○	○	○	○	○	○
	Linear scale (X1-axis)	○	○	○	○	○	○
	Linear scale (X2-axis)	X	X	○	X	X	○
	Linear scale (Y / Z-axis)	○	○	○	○	○	○
	Oil cooler cooling flow detector	○	○	○	○	○	○
Measurement	Auto tool setter(Milling spindle,Touch)	○	○	○	○	○	○
	Auto tool setter(Milling spindle, Non-contact, NC4 or BLUM)	○	○	○	○	○	○
	Auto tool setter (Low turret)	X	X	○	X	X	○
	Removable tool setter (Low turret)	X	X	○	X	X	○
	Auto workpiece measurement (RMP60)	○	○	○	○	○	○
Automation	Parts unloader and conveyor(both left & right spindle direction, pocket type or gripper type)	X	○	○	X	○	○
	Workpiece ejector (TSC/TSA selectable)	X	○	○	X	○	○
	Bar feeder interface	○	○	○	○	○	○
	Robot interface	○	○	○	○	○	○
	Automatic front door (with safety device)	○	○	○	○	○	○
Others	DN Solutions tool monitoring system	●	●	●	●	●	●
	Rotary type window wipe	○	○	○	○	○	○
	Intelligent kinematic compensation for multi-tasking (Software customized by DN Solutions)	●	●	●	●	●	●
	Intelligent geometric compensation for multi-tasking(Datum ball gage)	○	○	○	○	○	○
	Quick change tooling(Low turret, CAPTO)	X	X	○	X	X	○
	AUTOMATIC POWER OFF	○	○	○	○	○	○
	Display unit size 15 inch(Fanuc)	●	●	●	●	●	●
	19 inch(Fanuc, CUFOS)	○	○	○	○	○	○
	21.5 inch(Siemens)	●	●	●	●	●	●
	ADDITIONAL PORTABLE MPG	●	●	●	●	●	●
Standard accessories	Foundation bolt for anchoring	●	●	●	●	●	●
Customized special option	Air limit sensing on chuck Preparation	○	○	○	○	○	○
	Tool setter extension for special chuck (Low turret)	○	○	○	○	○	○
	Left/Right spindle air curtain	○	○	○	○	○	○
	Coolant for milling spindle_Multi pressure	○	○	○	○	○	○
	Tool ID check system_Manual	○	○	○	○	○	○
	Additional work light for ATC magazine	○	○	○	○	○	○
	Angular head for milling spindle_ATC	○	○	○	○	○	○

● Standard ● Optional X Not applicable



STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Specifications	SMX 2600	SMX 3100	SMX 3100L	SMX 2600S	SMX 3100S	SMX 3100LS	SMX 2600ST	SMX 3100ST
Tool shank	CAPTO C6	●	●	●	●	●	●	●	●
	HSK-A63	○	○	○	○	○	○	○	○
Automatic tool changer	7" operation touch panel	●	●	●	●	●	●	●	●
	10.4" operation touch panel (including a camera in the magazine)	○	○	○	○	○	○	○	○
Tool magazine	40 tools	●	●	●	●	●	●	●	●
	80 tools	○	○	○	○	○	○	○	○
	120 tools	○*	○*	○*	○*	○*	○*	○*	○*
Tool magazine for long boring bar	3 tools	X	X	○	X	X	○	X	X
Low turret	12 stations turning	X	X	X	X	X	X	●	●
	12 stations turn-milling (BMT65P)	X	X	X	X	X	X	○	○
Work holding device	Left spindle Hydraulic chuck 10"	●	X	X	●	X	X	●	X
	Hydraulic chuck 12"	○	●	●	○	●	●	○	●
	Hydraulic chuck 15"	X	○	○	X	○	○	X	○
	Right spindle Hydraulic chuck 10"	X	X	X	●	●	●	●	●
	Hydraulic chuck 12"	X	X	X	○	○	○	○	○
	Dual pressure chucking (High pressure / Low pressure)	○	○	○	○	○	○	○	○
	Chuck clamp & Unclamp confirmation	○	○	○	○	○	○	○	○
	Servo driven steady rest (SLU3.1~SLU5) - parking function NOT available	○	○	○	○	○	○	X	X
	Servo driven steady rest (SLU5.1 or K5.0 or K5.1) - with parking function	X	X	○	X	X	○	X	X
	Servo driven steady rest (SLU3Z or 3.1Z or 3.2Z) - Lower turret	X	X	X	X	X	X	○	○
Coolant	V stand for sha workpiece	○	○	○	○	○	○	○	○
	Pressure 1.0MPa (145 psi) / Bag filter	●	●	●	●	●	●	●	●
	T-T-C (Milling spindle) Pressure 3.0MPa (435 psi)/Cyclone filter	○	○	○	○	○	○	○	○
	Pressure 7.0MPa (1015 psi) / Cyclone filter	○	○	○	○	○	○	○	○
	Pressure 7.0MPa (1015 psi)/Paper filter	○	○	○	○	○	○	○	○
	MQL (Minimum quantity lubrication) system	○	○	○	○	○	○	○	○
	For Lower turret Pressure 0.45MPa (65.2psi) / Tank screen filter	X	X	X	X	X	X	●	●
	Pressure 0.7 / 1.0 / 1.45 MPa (101.5/145/151.1 psi) / Tank screen filter	X	X	X	X	X	X	○	○
	Oil skimmer	○	○	○	○	○	○	○	○
	Coolant pressure switch (Standard for milling spindle / option for lower turret)	●	●	●	●	●	●	●	●
Chip disposal	Lower turret coolant filter	X	X	X	X	X	X	○	○
	Coolant level switch : Sensing level - Low	●	●	●	●	●	●	●	●
	Chip conveyor (Right disposal)	○	○	○	○	○	○	○	○
	Chip bucket	○	○	○	○	○	○	○	○
	Air blower (for Left or Right spindle chuck)	●	●	●	●	●	●	●	●
	Chuck coolant (for Left or Right spindle chuck)	○	○	○	○	○	○	○	○
	Through spindle air shower (Left or Right)	○	○	○	○	○	○	○	○
	Through spindle coolant (Left or Right)	○	○	○	○	○	○	○	○
	Shower coolant (0.75kW, 85 liter/min)	○	○	○	○	○	○	○	○
	Coolant gun	○	○	○	○	○	○	○	○
High accuracy	Air gun	○	○	○	○	○	○	○	○
	Mist collector	○	○	○	○	○	○	○	○
	Thermal compensation	●	●	●	●	●	●	●	●
	Ball screw core cooling (X-axis)	●	●	●	●	●	●	●	●
	Ball screw core cooling (Y/Z-axis)	○	○	○	○	○	○	○	○
	Coolant chiller (Coolant Chiller, Temperature control)	○	○	○	○	○	○	○	○
	Linear scale (X1-axis)	○	○	●	○	○	●	○	○
	Linear scale (X2-axis)	X	X	X	X	X	X	○	○
	Linear scale (Y / Z-axis)	○	○	○	○	○	○	○	○
	Oil cooler cooling flow detector	○	○	○	○	○	○	○	○
Measurement	Auto tool setter(Milling spindle,Touch)	○	○	○	○	○	○	○	○
	Auto tool setter(Milling spindle, Non-contact, NC4 or BLUM)	○	○	○	○	○	○	○	○
	Auto tool setter (Low turret)	○	○	○	○	○	○	○	○
	Removable tool setter (Low turret)	○	○	○	○	○	○	○	○
	Auto workpiece measurement (RMP60)	○	○	○	○	○	○	○	○
Automation	Parts unloader and conveyor(pocket type or gripper type)	X	X	X	○	○	X	○	○
	Workpiece ejector (TSC/TSA selectable)	X	X	X	○	○	X	○	○
	Bar feeder interface	○	○	○	○	○	○	○*	○*
	Automatic front door (with safety device)	○	○	○	○	○	○	○	○
Others	DN Solutions tool monitoring system	●	●	●	●	●	●	●	●
	Rotary type window wipe	○	○	○	○	○	○	○	○
	Intelligent geometric compensation for multi-tasking (Software customized by DN Solutions)	●	●	●	●	●	●	●	●
	Intelligent geometric compensation for multi-tasking(Datum ball gage)	○	○	○	○	○	○	○	○
	Quick change tooling(Low turret, CAPTO)	○	○	○	○	○	○	○	○
	Display unit size	●	●	●	●	●	●	●	●
Standard accessories	15 inch(Fanuc)	○	○	○	○	○	○	○	○
	19 inch(Fanuc, CUFOS)	○	○	○	○	○	○	○	○
	21.5 inch(Siemens)	●	●	●	●	●	●	●	●
Customized special option	Foundation bolt for anchoring	●	●	●	●	●	●	●	●
	Air limit sensing on chuck Preparation	○	○	○	○	○	○	○	○
	Tool setter extension for special chuck	X	X	X	X	X	X	○	○
	Main/Left spindle air curtain	○	○	○	○	○	○	○	○
	Sub/Right spindle air curtain	X	X	X	○	○	○	○	○
	Coolant for milling spindle Multi pressure	○	○	○	○	○	○	○	○
	Tool ID check system Manual	○	○	○	○	○	○	○	○
	Additional work light for ATC magazine	○	○	○	○	○	○	○	○
	Angular head for milling spindle ATC	○	○	○	○	○	○	○	○

* Bar feeder interface is not available if 120 tools magazine is applied on the machine.

● Standard ● Optional X Not applicable

PERIPHERAL EQUIPMENT


Tailstock application for lower turret OPTION

- Steady rest to support long and slim components, and for improving machining stability
- Tailstock application for lower turret is available for SMX 2600ST/3100ST. OPTION



Tool setter (Automatic) OPTION

Auto linear motion type tool setter has been installed for tool measurement and tool wear detection. It is stored in a safe location during the machining process, and can be activated with the workpiece still in place in the chuck with no interference.

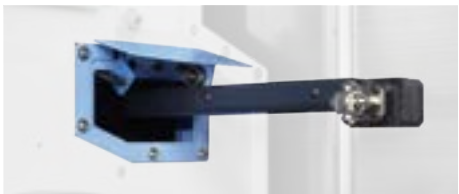

Gear skiving solutions

Dramatic improvements in productivity for gear skiving solutions such as power skiving, invo-milling and hobbing are available - enabling high-precision external / internal gear machining in a single setup.



* Please contact to DN Solutions on further information.

Linear scales OPTION

Linear scales are ideal for high accuracy simultaneous 5-axis machining, long machining runs and operation, and higher feed precision.



* Lower turret applicable

Servo-driven steady rest OPTION

Steady rests support long workpieces during the machining process. Linear positioning of the steady rest is achieved by the servo motor and ball screw and can be positioned in cycle.



Servo-driven steady rest	SMX 2100 /S/B/SB	SMX 2100 ST/STB	SMX 2600/S	SMX 2600ST	SMX 3100/S	SMX 3100ST	SMX 3100L/LS
SLU-3.1 (Ø20-Ø165mm)	○	-	○	-	○	-	○
SLU-3.2 (Ø50-Ø200mm)	○	-	○	-	○	-	○
SLU-4 (Ø30-Ø245mm)	○	-	○	-	○	-	○
SLU-5 (Ø45-Ø310mm)	○	-	○	-	○	-	○
SLU-5.1 (Ø85-Ø350mm)	○	-	-	-	-	-	○ (Parking function)
K 5.0 (Ø80-Ø390mm)	-	-	-	-	-	-	○ (Parking function)
K 5.1 (Ø100-Ø410mm)	-	-	-	-	-	-	○ (Parking function)
Lower turret_SLU-3 (Ø12-Ø152mm)	-	○	-	○	-	○	-
Lower turret_SLU-3.1 (Ø20-Ø165mm)	-	○	-	○	-	○	-
Lower turret_SLU-3.2 (Ø50-Ø200mm)	-	-	-	○	-	○	-

Steady rest parking function*

When you don't want to use the steady rest, you can park it under the left chuck.

* This function is available for the SMX 3100L/LS.
The steady rest will be from the following SLU5.1, K5.0 and K5.1.




Chip conveyor (Right side exit) OPTION

The conveyor provides a superior chip removal system and has a stable structure for easy maintenance and reduced leakage. By selecting the correct type of conveyor, the efficiency of the machine is increased.

Name	Hinge belt	Magnetic scraper	Drum filter + Hinge scraper (Double type)
Application	For steel	For castings	For steel, castings, nonferrous metal
Features	- General - Appropriate for a heavy material chip of more than 30 mm in length	- Easy maintenance - Eject the chip by scraping and raising the chip with the scraper	- Appropriate for both a long and a short chip - Filtering coolant
Shape			


Coolant chiller (Recommendation) OPTION

Coolant chiller is highly recommended to prevent temperature rise and minimize thermal deformation, when using a water-insoluble coolant or high-pressure coolant system of which the power is over 1.5 kw.

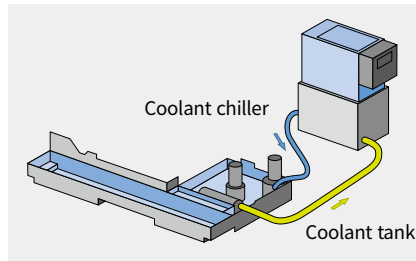


Optional equipment for automation OPTION

Peripheral equipment is available to support the SMX improve its performance and productivity.

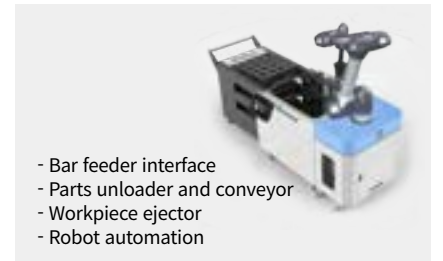


FANUC 31i/32i PLUS


Left_SMX 2100/S/ST, Right_SMX 2100S/ST/SB/STB

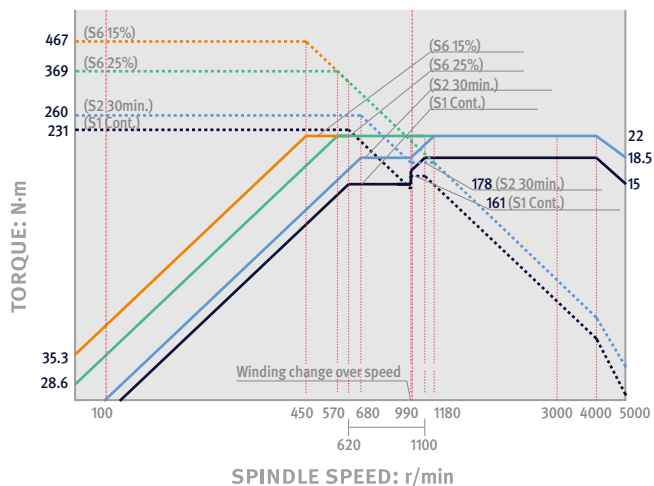


Left_SMX 2100B/SB/STB

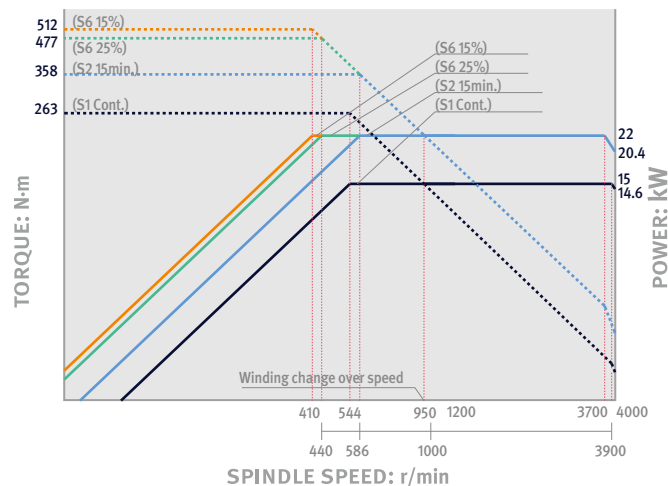


Rotary tool for lower turret (Milling)_SMX 2100ST/STB_5000 r/min **OPTION**

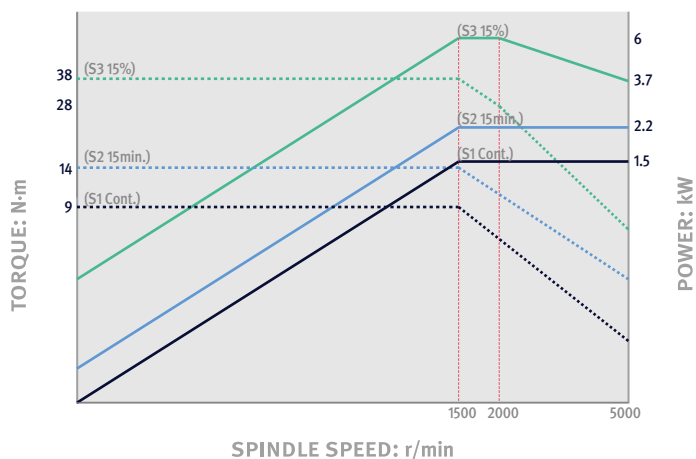

Rotary tool for lower turret (Milling)_SMX 2100ST/STB_10000 r/min **OPTION**

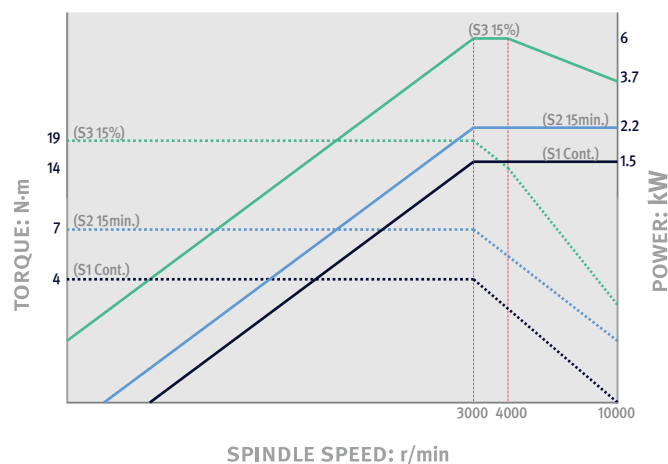


Milling_SMX 2100/S/ST/B/SB/STB

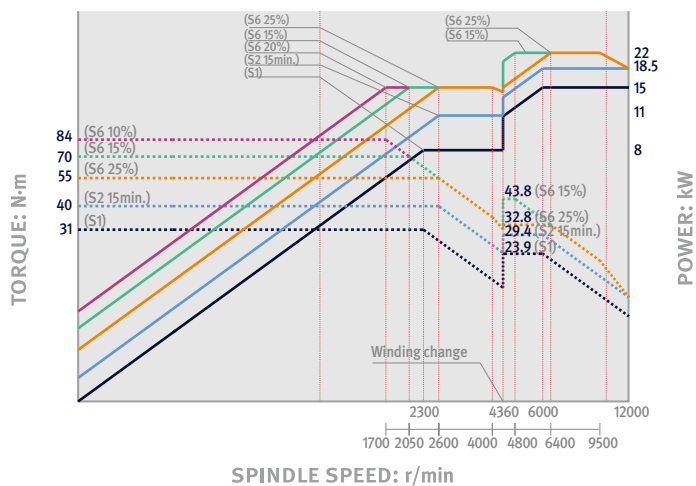


POWER | TORQUE

FANUC 31i/32i PLUS


Left_SMX 2600/S/ST

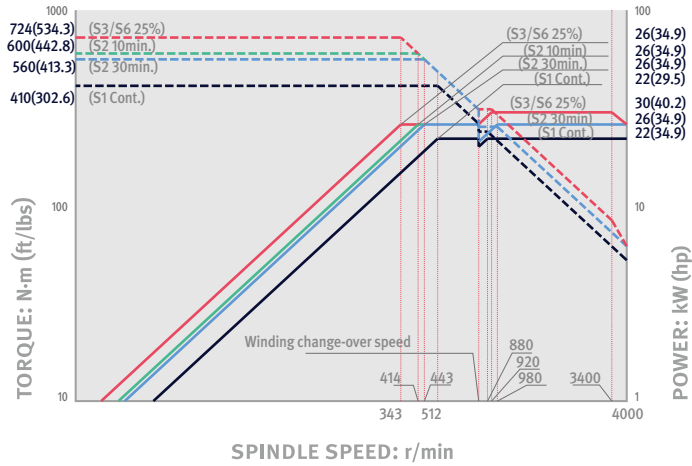


Left_SMX 3100/L/S/LS/ST

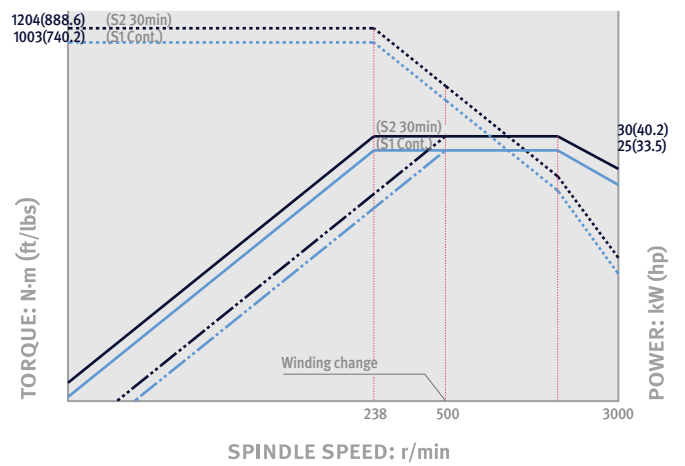


Right_SMX 2600S/ST · 3100S/LS/ST

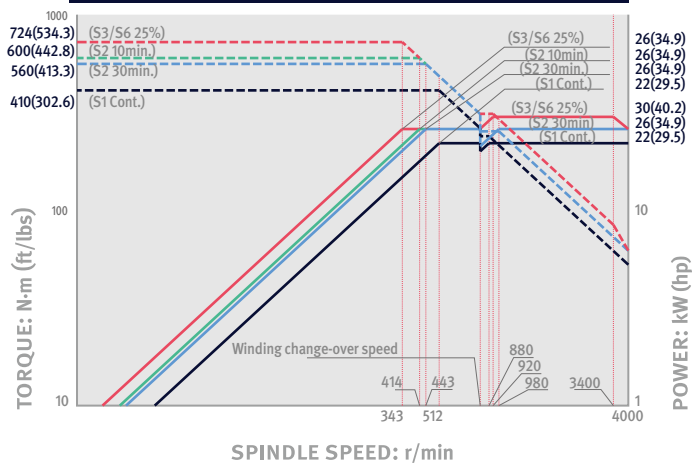

Milling_SMX 2600/S/ST · 3100/L/S/LS/ST

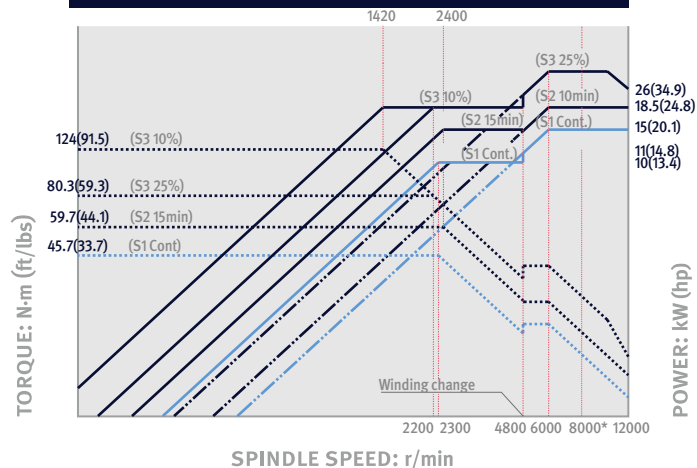

Rotary tool for lower turret (Milling)_SMX 2600ST · 3100ST OPTION

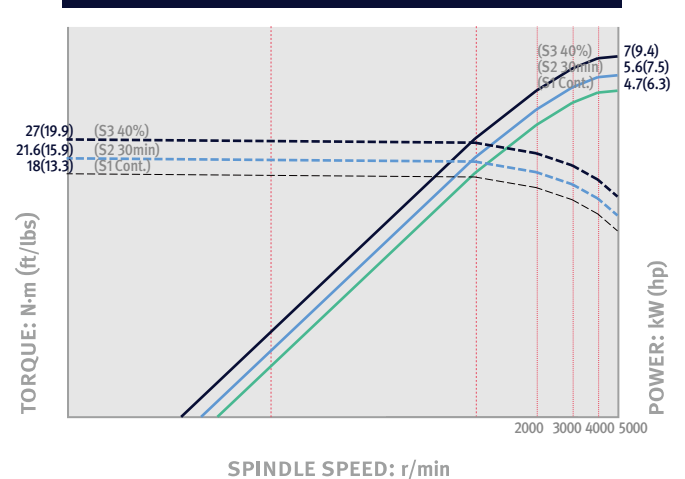


* 8000 r/min of Milling spindle is available as option. OPTION


POWER | TORQUE

SIEMENS


Left_SMX 2600/S/ST

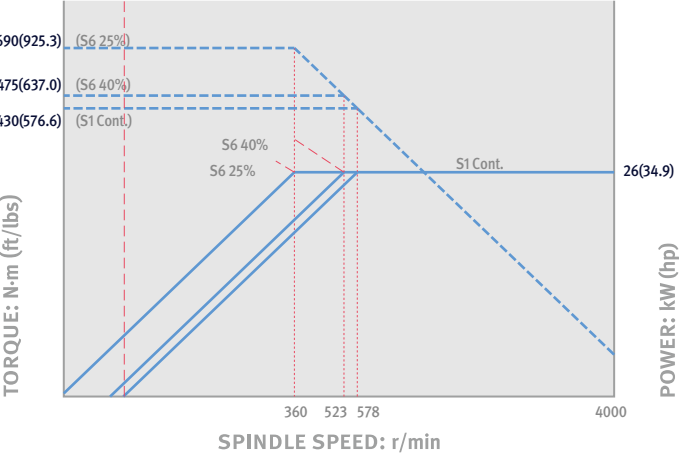


Left_SMX 3100/L/S/LS/ST

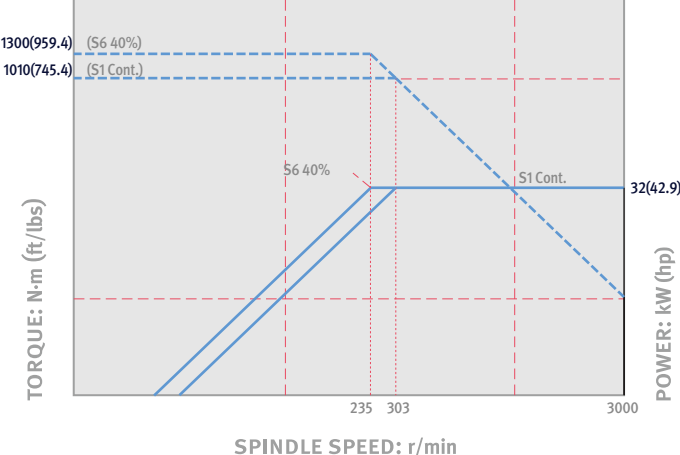


Right_SMX 2600S/ST · 3100S/LS/ST

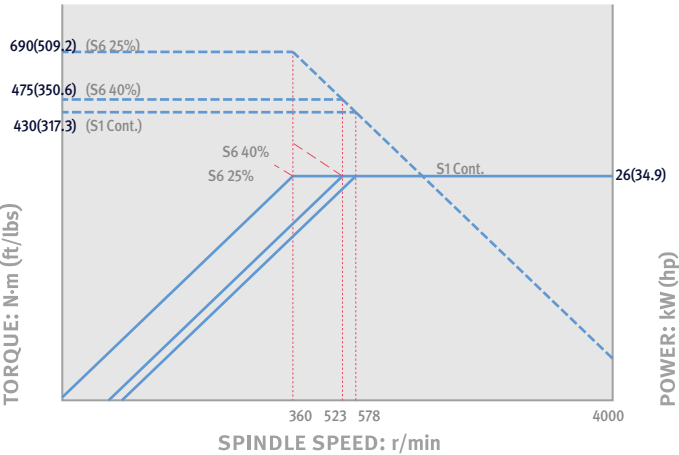

Lower turret_SMX 2600ST · 3100ST OPTION

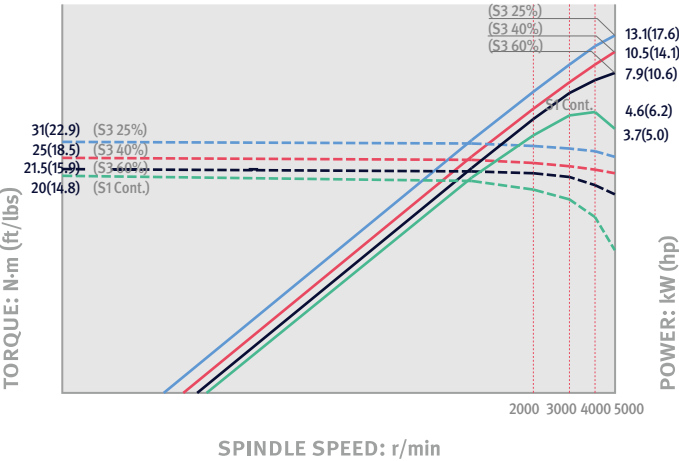


Milling_SMX 2600/S/ST · 3100/L/S/LS/ST

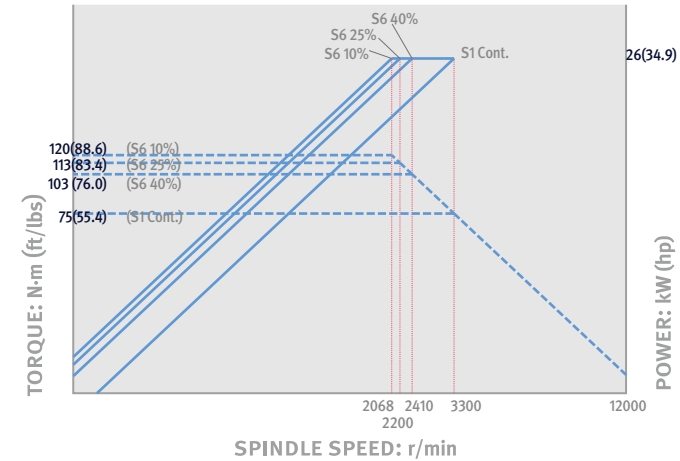

SMX 2100ST· 2100STB

For turning (12 stations)



stations, BMT55P)

Ø360(Max. turning dia.)

Ø592(Max. swing dia.)

Ø40

Ø238

Ø218

102

Ø16

81

100

50

80

Ø374

Ø160

Ø25

35

185

35

75

165

220(X2-axis travels)

110


165

For turn-milling (12 stations, 24indexing BMT55P)


[illegible]

SMX 2600ST · SMX 3100ST

For turning (12 stations)

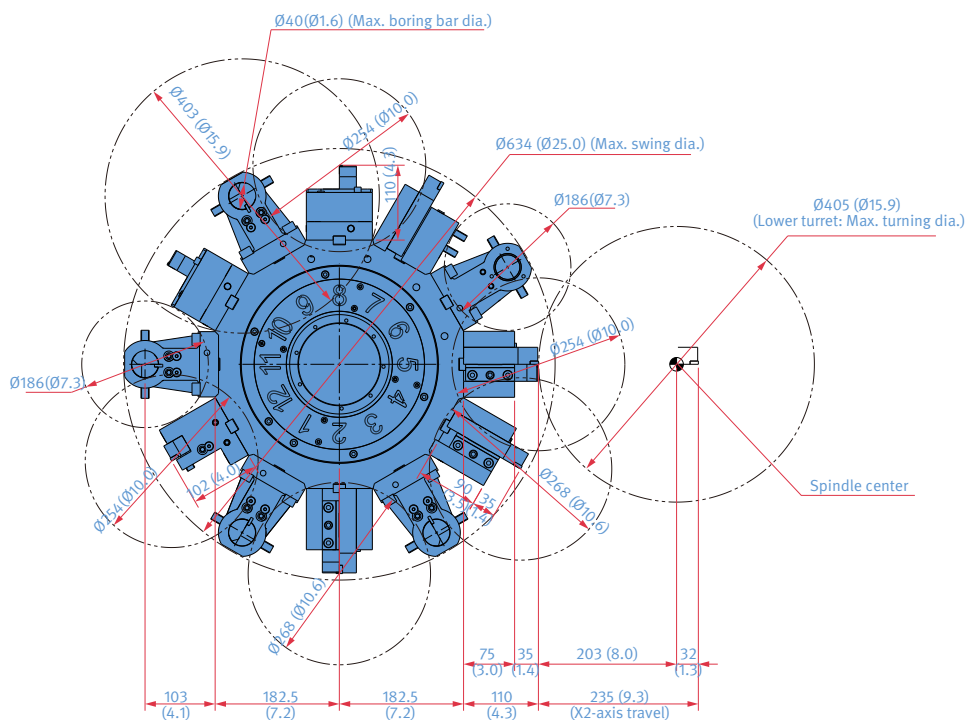

OPTION

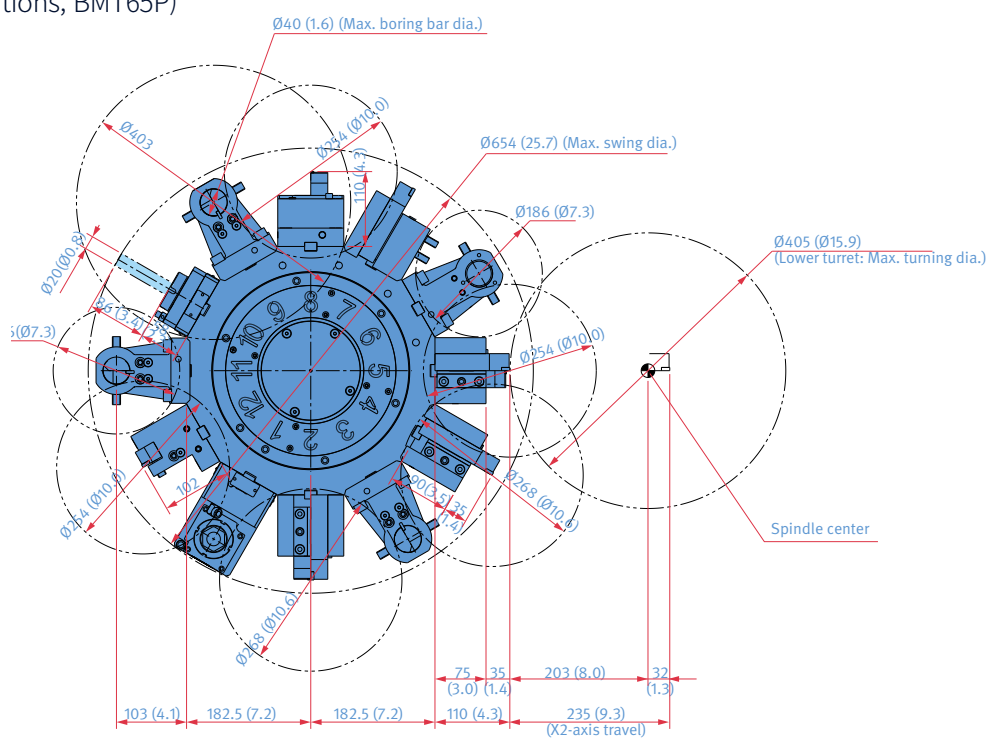


EXTERNAL DIMENSIONS


SMX 2100/S/ST/B/SB/STB

Unit : mm (inch)

TOP

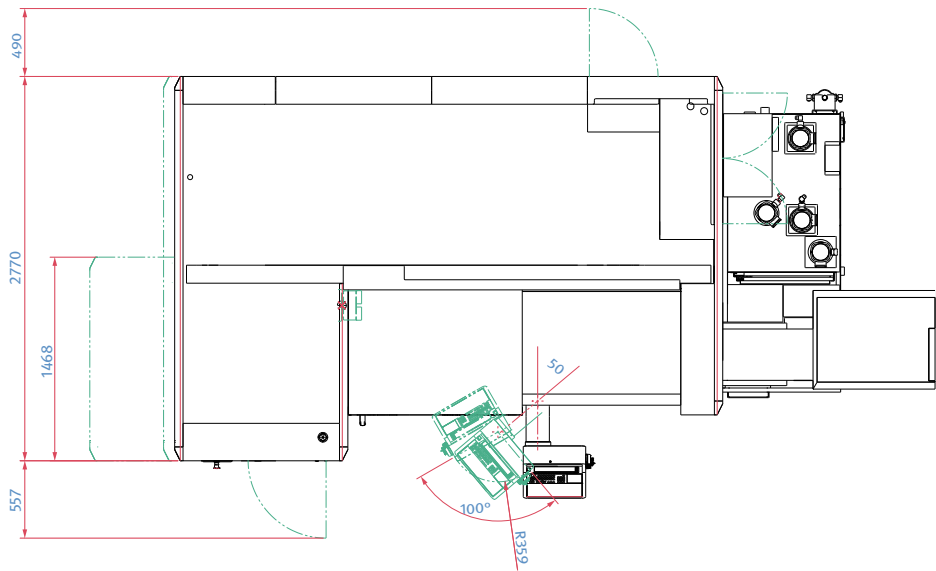

FRONT

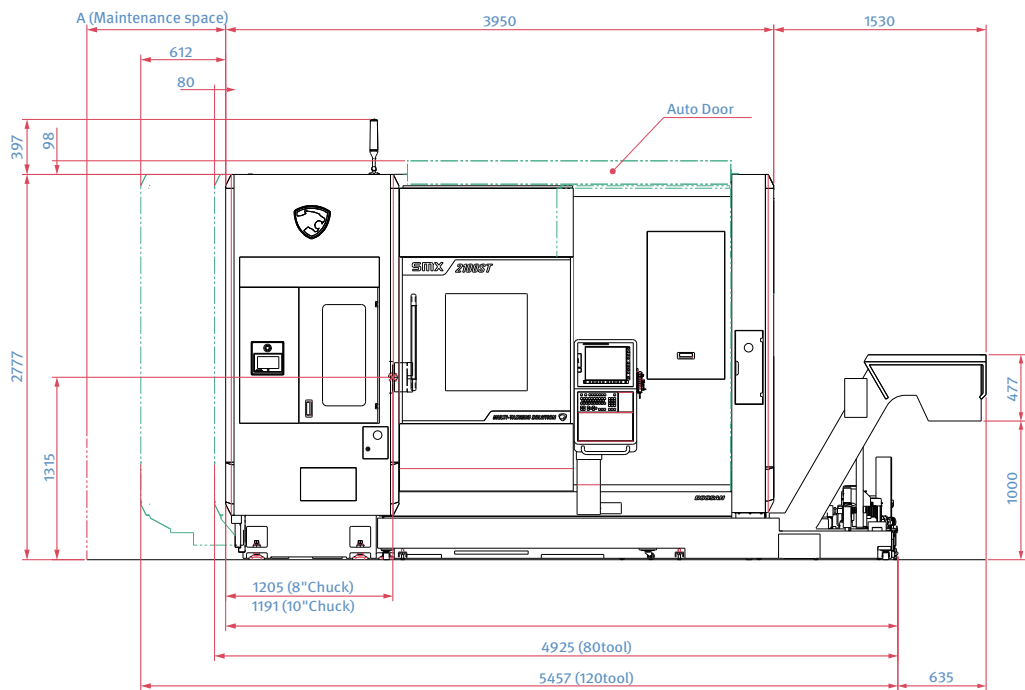


Maintenance space	A
40 tool	1000 (39.4)
80 tool	1080 (42.5)
120 tool	1612 (63.5)


Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.
* Some peripherals can be placed in different locations.

SMX 2600/S · 3100/L/S/LS

TOP

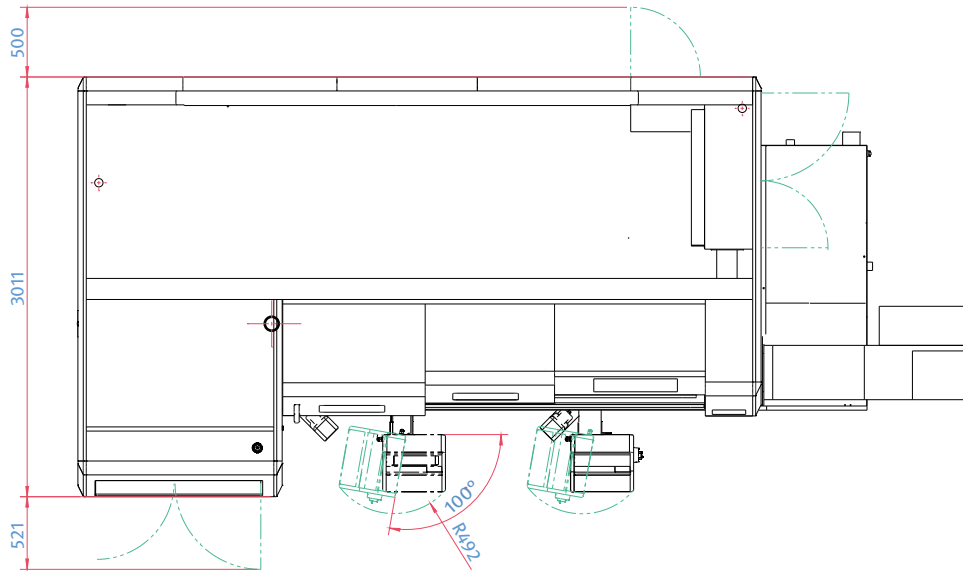

FRONT

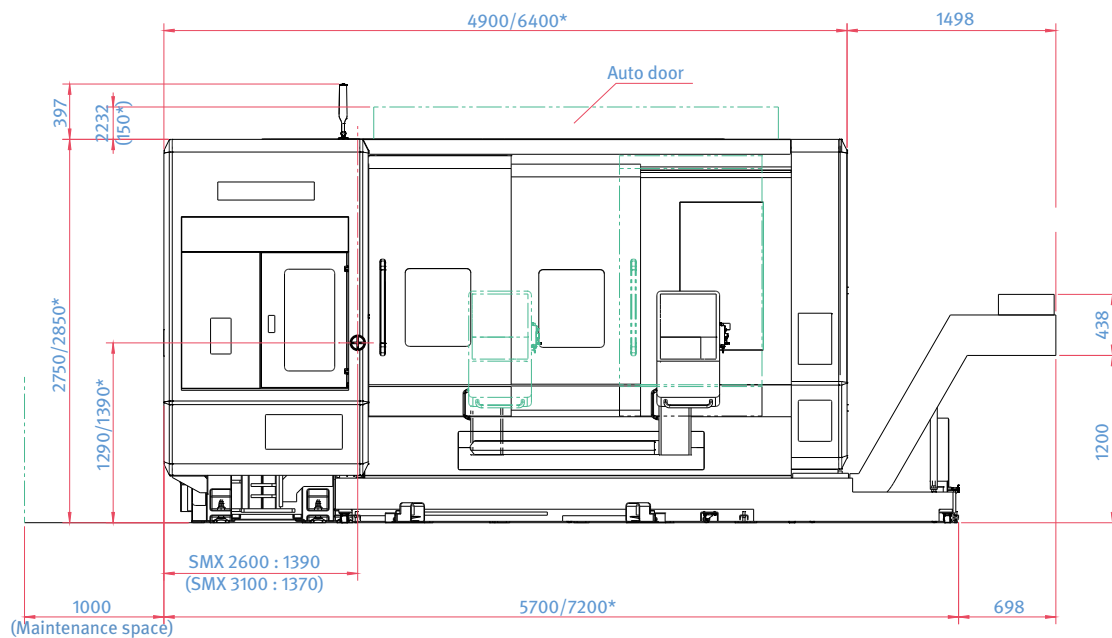


** Some peripherals can be placed in different locations.*

EXTERNAL DIMENSIONS

SMX 2600ST · 3100ST

Unit : mm (inch)


TOP

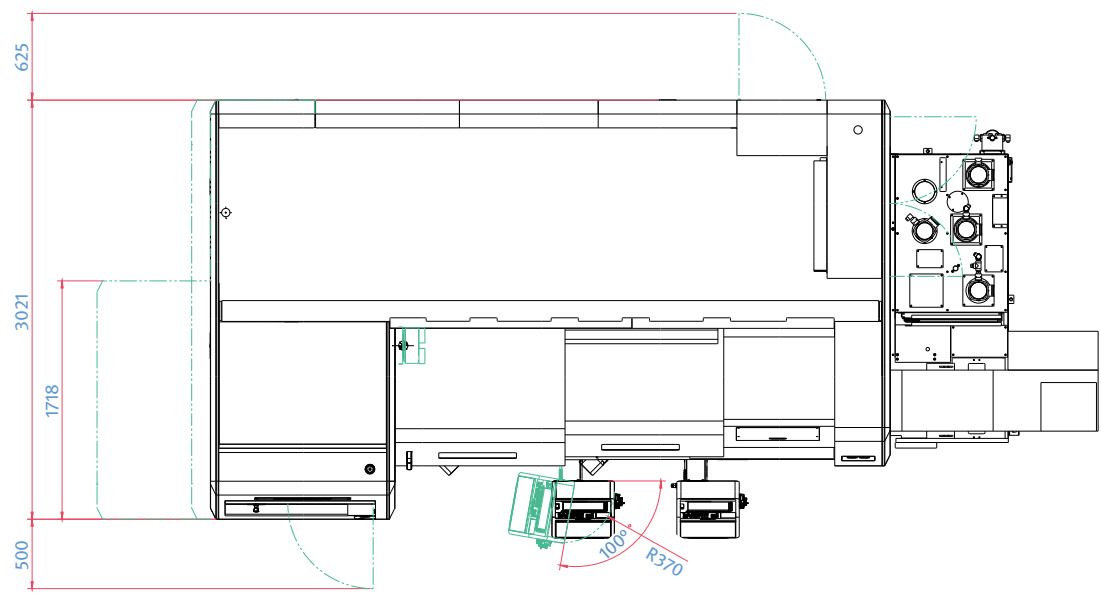

Maintenance space	D
40 tool	1000 (39.4)
80 tool	1135 (44.7)
120 tool	1817 (71.5)

Chip conveyor type	A	B	C
Hinge belt type	1498 (59.0)	1100 (43.3)	0
Drum filter+Hinge scraper type	2355 (92.7)	1100 (43.3)	70 (2.8)

FRONT

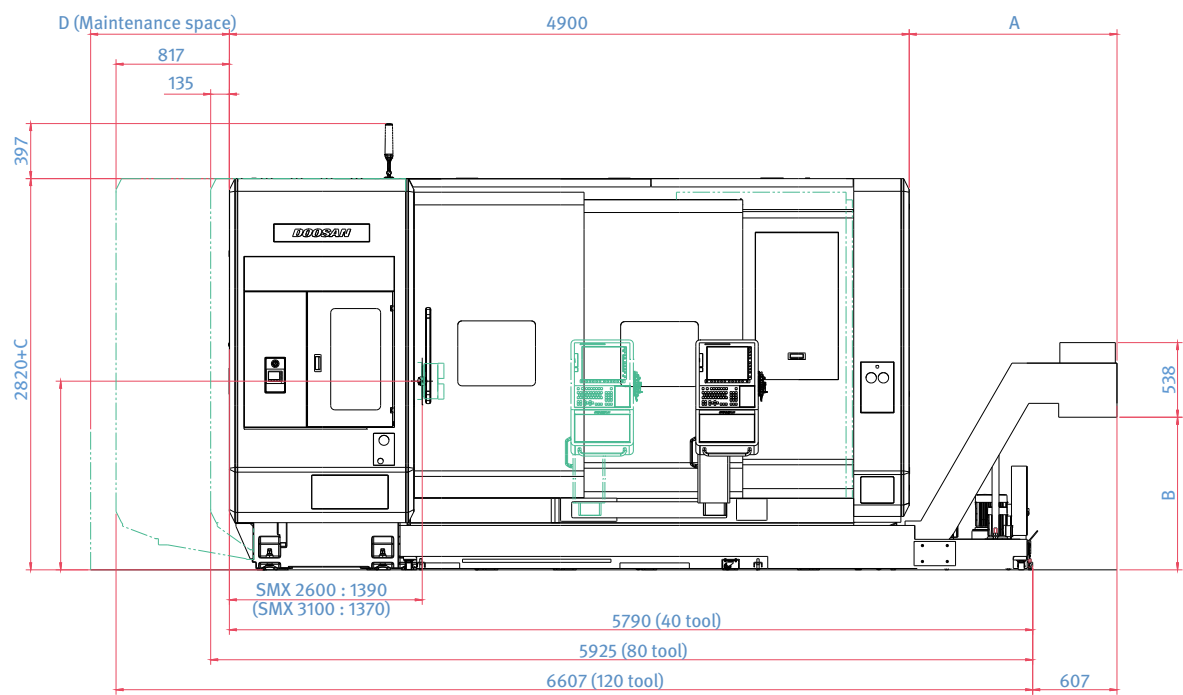

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.
* Some peripherals can be placed in different locations.


TOOLING SYSTEM

SMX 2100ST/STB

Unit : mm (inch)

Standard


 Turning turret
 Milling turret

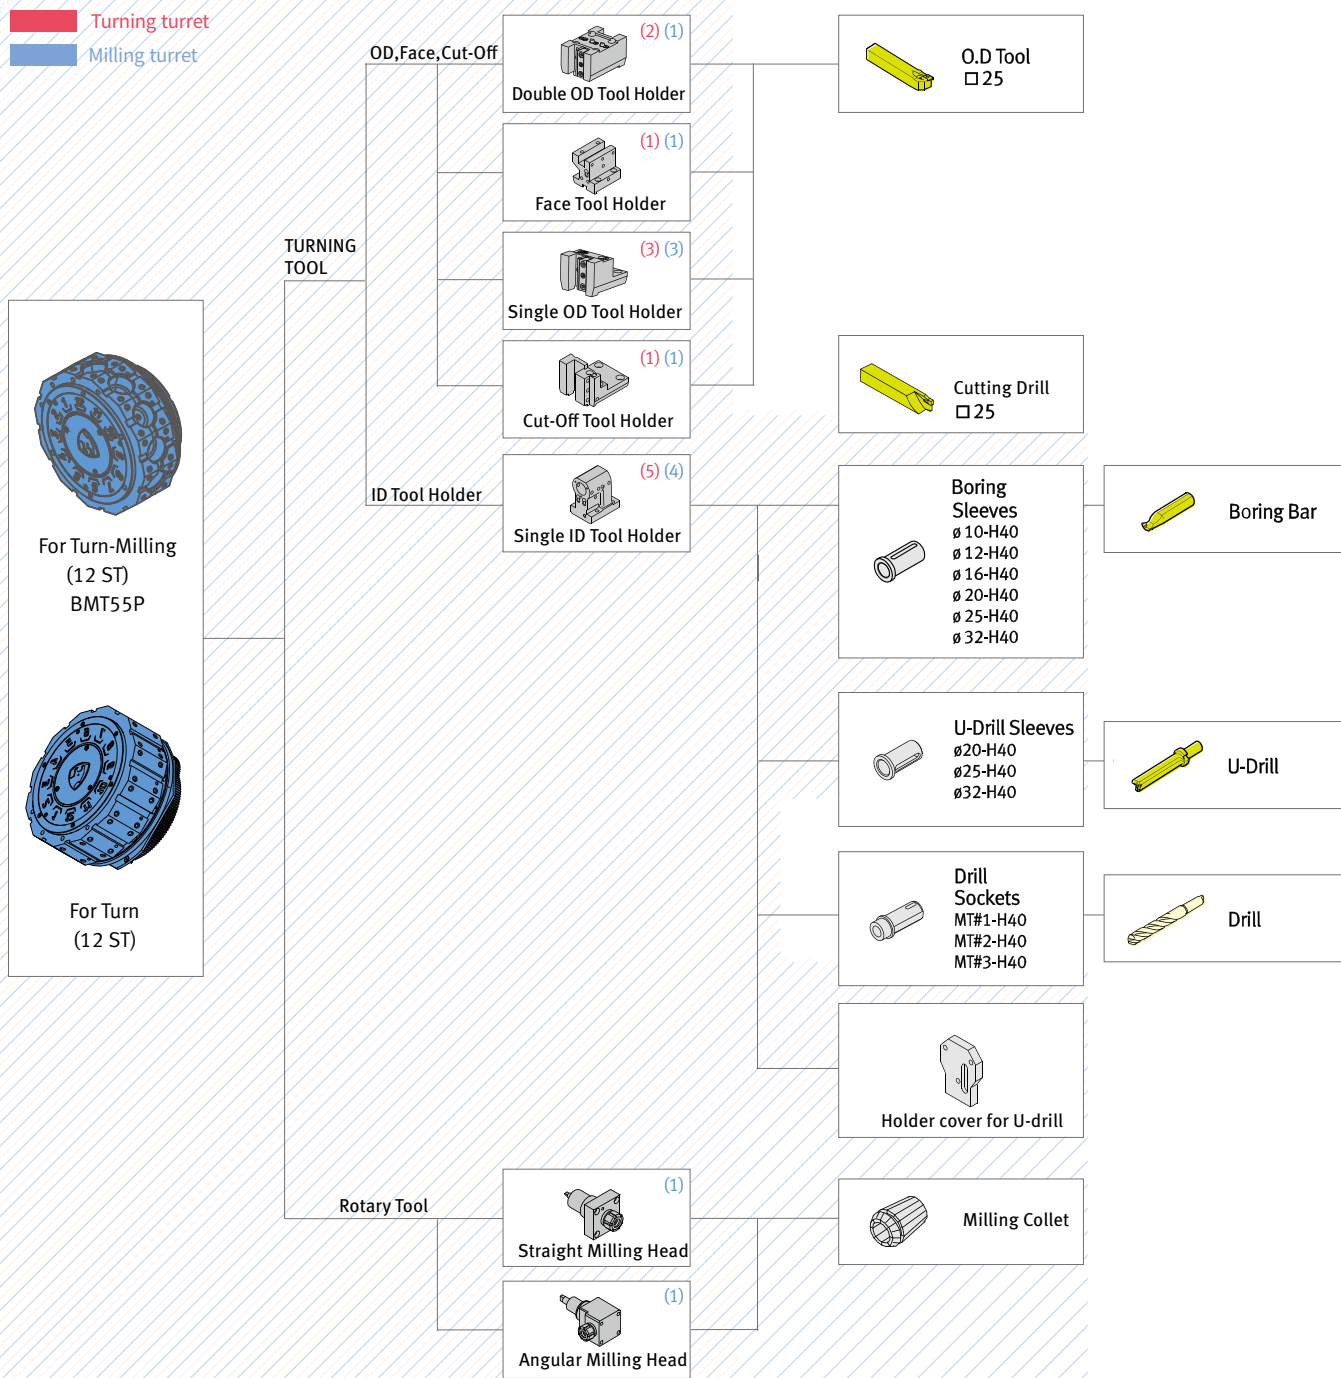

TOOLING SYSTEM

SMX 2100ST/STB


Unit : mm (inch)

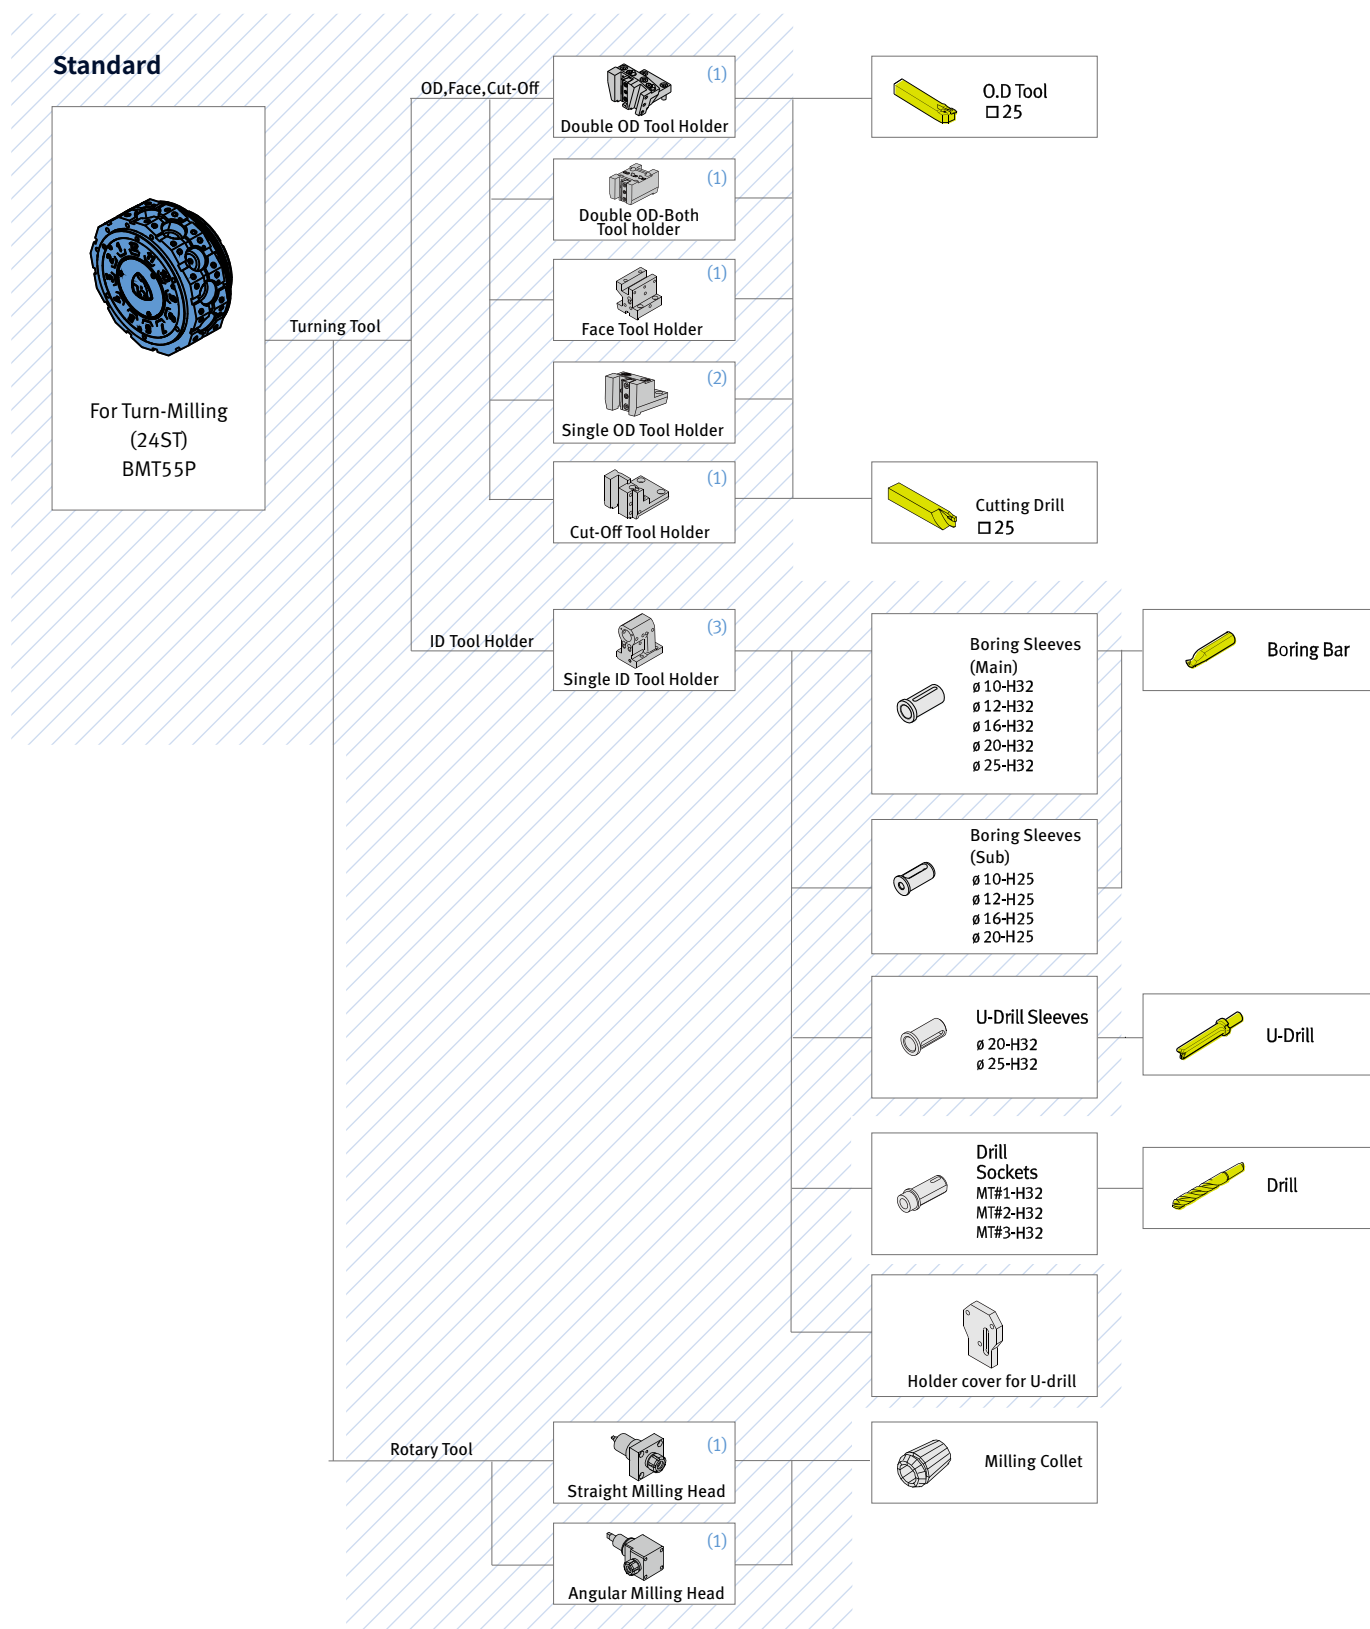

TOOLING SYSTEM

SMX 2600ST · 3100ST


Unit : mm (inch)

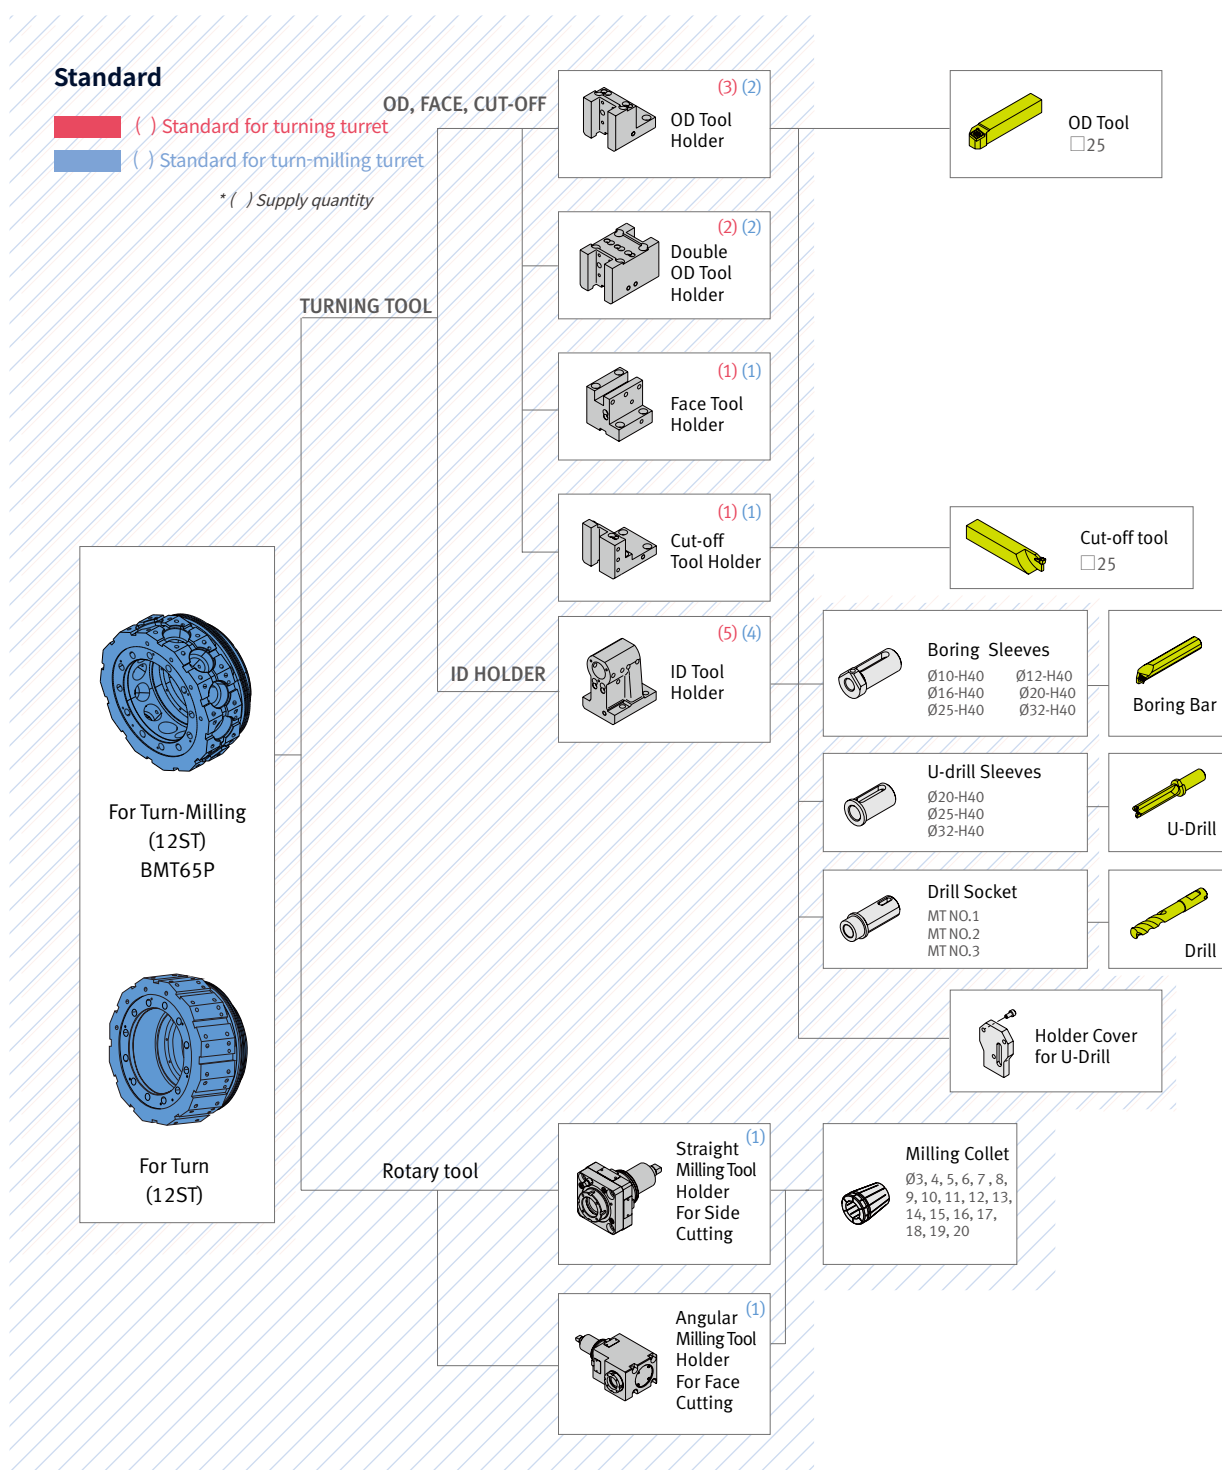

SMX 2100/B/S/SB


SMX 2100/B

Y-AXIS WORKING RANGE

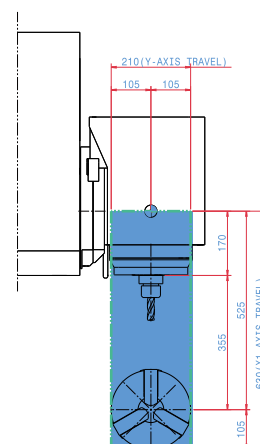


ENTIRE RANGE

Y-AXIS WORKING RANGE

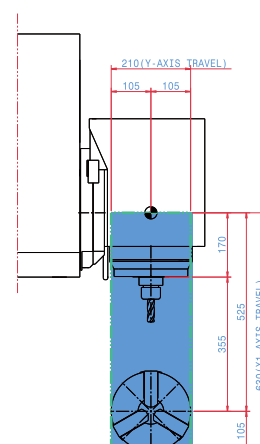

SMX 2100ST/STB

ENTIRE RANGE

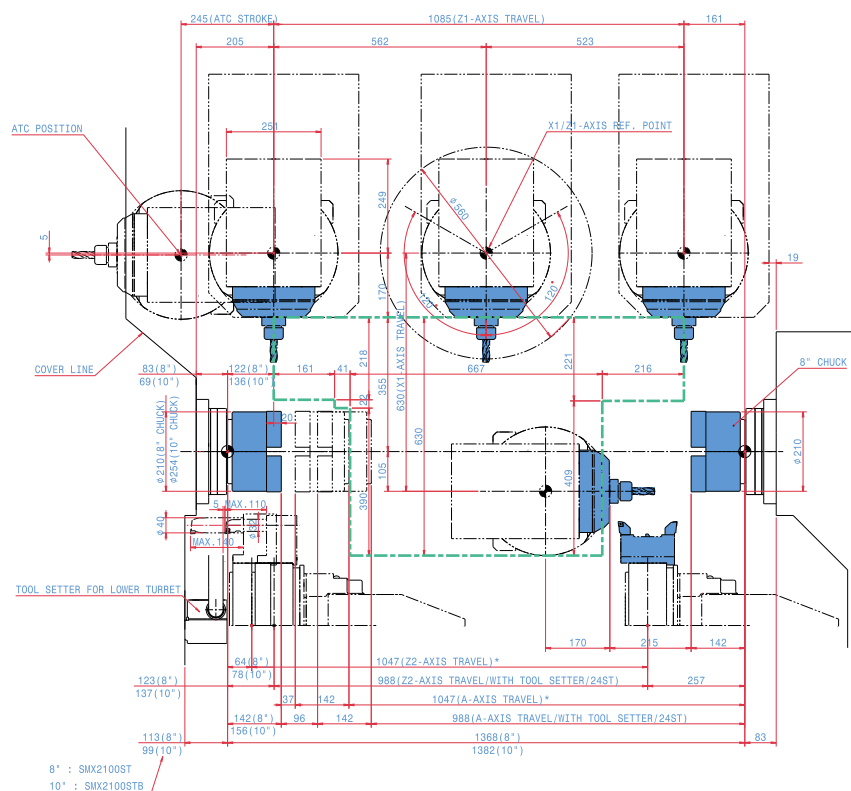

Technical drawing of the machine's upper structure, showing dimensions and travel ranges. The drawing includes a side view of the upper structure and a top view of the turret and saddle assembly.

Dimensions and Travel Ranges:

- 210(Y-AXIS TRAVEL)**: Dimension for the Y-axis travel.
- 105**: Dimension for the X-axis travel.
- 170**: Dimension for the Z-axis travel.
- 525**: Dimension for the X-axis travel.
- 630(X1-AXIS TRAVEL)**: Dimension for the X1-axis travel.
- 360**: Dimension for the turning diameter of the lower turret.
- 460(X2-END POSITION)**: Dimension for the X2-end position.
- 185**: Dimension for the X2-end position.
- 110**: Dimension for the X2-end position.
- 185**: Dimension for the X2-end position.
- 220(X2-AXIS TRAVEL)**: Dimension for the X2-axis travel.
- 600**: Dimension for the swing over bed.
- 592(MAX. SWING DIA.)**: Dimension for the maximum swing diameter.
- 85°**: Angle for the swing over lower saddle.

Labels:


- (MAX. TURNING DIA. OF LOWER TURRET)**: Label for the maximum turning diameter of the lower turret.
- (SWING OVER BED)**: Label for the swing over bed.
- (SWING OVER LOWER SADDLE +END STROKE POSITION)**: Label for the swing over lower saddle +end stroke position.

WORKING RANGE

SMX 2600 · 3100/L

ENTIRE RANGE


Unit : mm (inch)

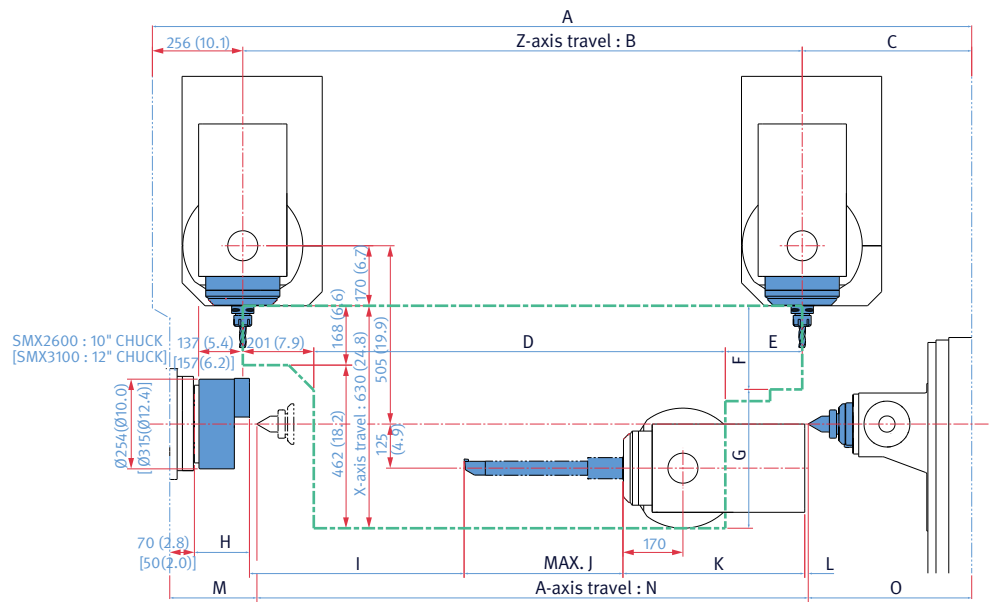


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
SMX 2600	2321 (91.4)	1585 (62.4)	480 (18.9)	1166 (45.9)	218 (8.6)	237 (9.3)	393 (15.5)	156 (6.1)	608 (23.9)	450 (17.7)	515 (20.3)	10 (0.4)	247 (9.7)	1562 (61.5)	463 (18.2)
SMX 3100								176 (6.93)							
SMX 3100L	3223 (126.9)	2585 (101.8)	382 (15)	2168 (85.4)	216 (8.5)	195 (7.7)	435 (17.1)	176 (6.93)	1610 (63.4)*	450 (17.7)*	515 (20.3)	12 (0.5)	313 (12.3)	2500 (98.4)	361 (14.2)

* "I" and "J" can be different depends on an applied long boring bar.

Y-AXIS WORKING RANGE

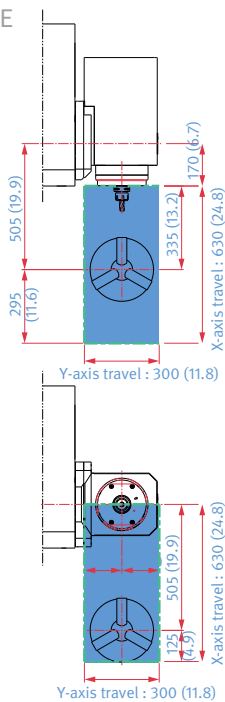

B-AXIS ROTATING RANGE

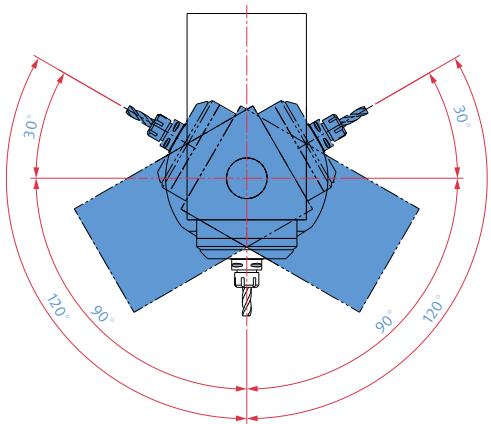


WORKING RANGE

SMX 2600S · 3100S/LS

ENTIRE RANGE


Unit : mm (inch)

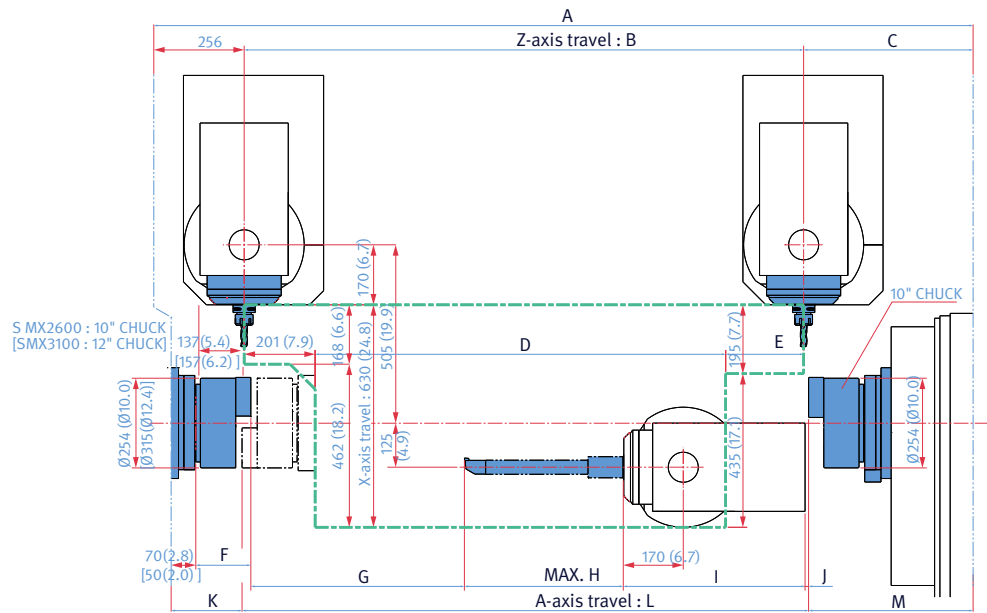


Model	A	B	C	D	E	F	G	H	I	J	K	L	M
SMX 2600S	2321 (91.4)	1585 (62.4)	480 (18.9)	1163 (45.8)	221 (8.7)	156 (6.1)	605 (23.8)	450 (17.7)	515 (20.3)	10 (0.4)	201 (7.9)	1605 (63.2)	466 (18.3)
SMX 3100S						176 (6.93)							
SMX 3100LS	3223 (126.9)	2585 (101.8)	382 (15)	2168 (85.4)	216 (8.5)	176 (6.93)	1610 (63.4)*	450 (17.7)*	515 (20.3)	10 (0.4)	311 (12.2)	2500 (98.4)	363 (14.3)

* "G" and "H" can be different depends on an applied long boring bar.

Y-AXIS WORKING RANGE

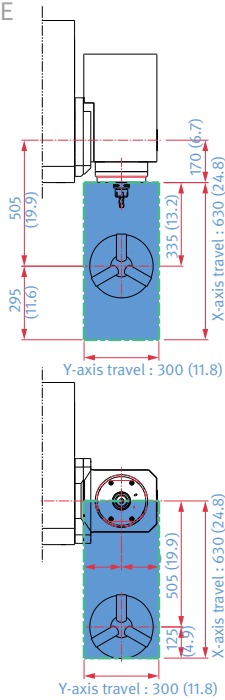


B-AXIS ROTATING RANGE

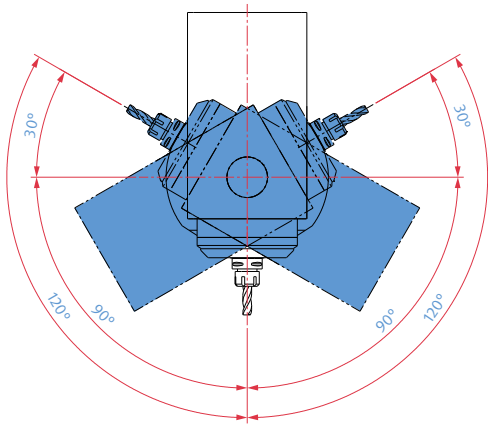


SMX 2600ST · 3100ST


Unit : mm (inch)



300 (11.8) (Y-axis travel)

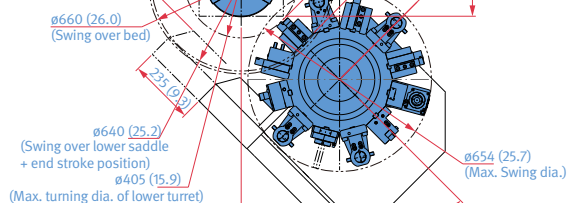

B-AXIS ROTATING RANGE

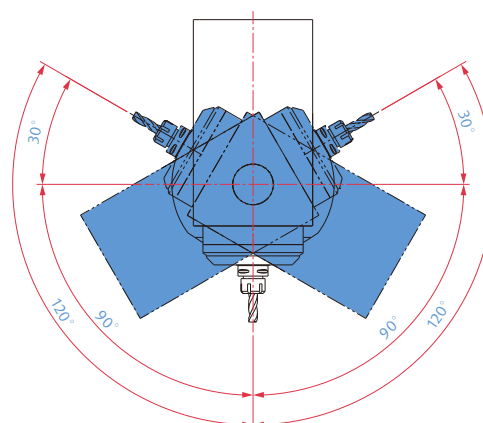

SMX 2100ST/STB Lower turret

ANGULAR MILLING HEAD




WORKING RANGE

SMX 2600ST · 3100ST Lower turret


Unit : mm (inch)

ANGULAR MILLING HEAD

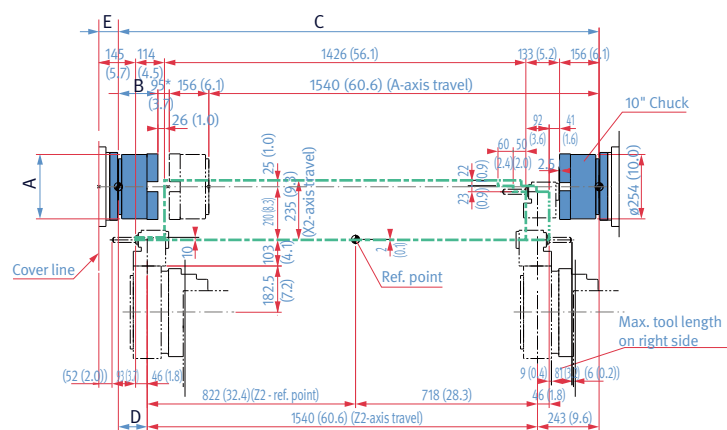


* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

STRAIGHT MILLING TOOL HOLDER

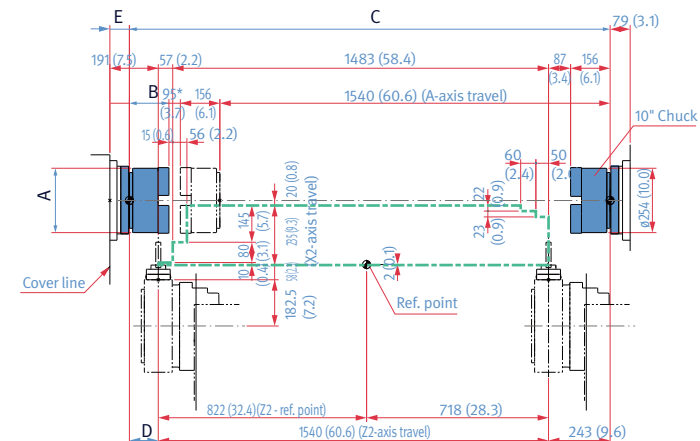


* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

ID TOOL HOLDER

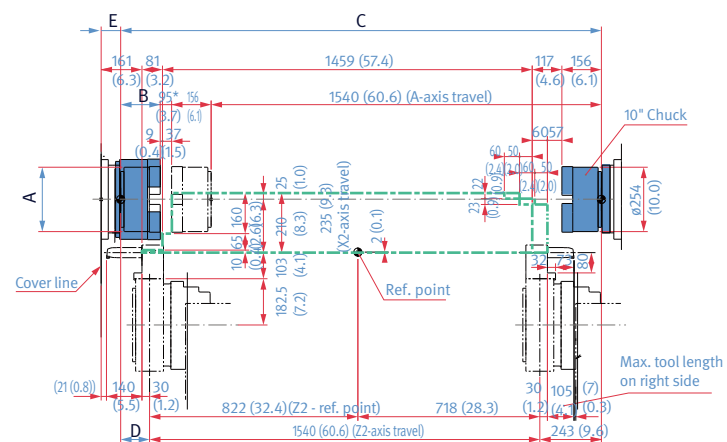

* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

OD TOOL HOLDER

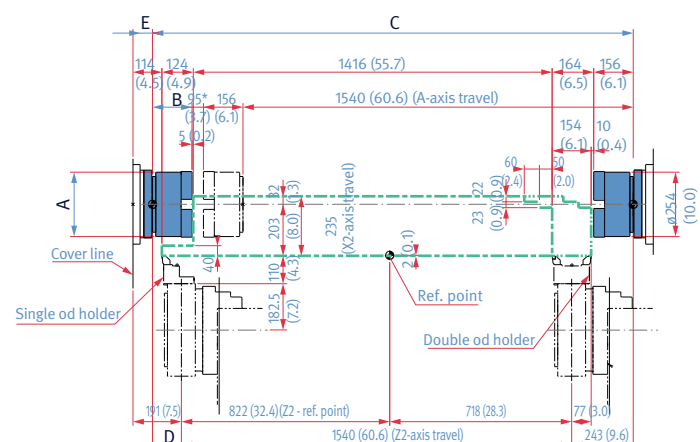

* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

	Unit	A	B	C	D	E
SMX 2600ST (10"chuck)	mm (inch)	ø254 (10.0)	156 (6.1)	1897 (74.7)	114 (4.5)	77 (3.0)
SMX 3100ST (12" chuck)	mm (inch)	ø315 (12.4)	176.5 (6.9)	1917 (75.5)	134 (5.3)	57 (2.2)

MACHINE SPECIFICATIONS

SMX 2100 series

Item			Unit	SMX2100	SMX2100S	SMX2100ST	SMX2100B	SMX2100SB	SMX2100STB
Capacity	Swing over bed		mm (inch)	600 (23.6)					
	Recom. turning diameter		mm (inch)	210 (8.3)			255 (10.0)		
	Max. turning diameter		mm (inch)	600 (23.6)					
	Max. turning length		mm (inch)	1040 (40.9)					
	Chuck size	Left spindle	inch	8			10		
		Right spindle	inch	-	8		-	8	
	Chuck work weight (include chuck)		kg (lb)	150 (330.7)			260 (573.2)		
Shaft work weight (include chuck)		kg (lb)	300 (661.4)	-		520 (1146.4)	-		
Bar working diameter		mm (inch)	65 (2.6)			81 (3.2)			
Travels	Travel distance	X-axis	mm (inch)	630(-105/+525) (24.8(-4.1/+20.7))					
		Y-axis	mm (inch)	210(±105) (8.3(±4.1))					
		Z-axis	mm (inch)	1085 (42.7)					
		A-ax	mm (inch)	-	1047 (41.2)		-	1047 (41.2)	
		B-axis	deg	240(±120)					
		C1-axis / C2-axis	deg	360 / -	360 / 360		360 / -	360 / 360	
		X2-axis / Z2-axis	mm (inch)	- / -		220 / 1047 (8.7 / 41.2)	- / -		220 / 1047 (8.7 / 41.2)
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)					
		Y-axis	m/min (ipm)	36 (1417.3)					
		Z-axis	m/min (ipm)	48 (1889.8)					
		A-axis	m/min (ipm)	-	30 (1181.1)		-	30 (1181.1)	
		B-axis	r/min	40					
		C1-axis / C2-axis	r/min	200 / -	200 / 200		200 / -	200 / 200	
		X2-axis / Z2-axis	m/min (ipm)	- / -		24 / 36 (944.9 / 1417.3)	- / -		24 / 36 (944.9 / 1417.3)
Left spindle	Max. spindle speed		r/min	5000			4000		
	Spindle motor power (S3 15%/S3 25%/30min/cont.)		kW (Hp)	22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)			22 / 22 / 22 / 15 (29.5 / 29.5 / 29.5 / 20.1)		
	Spindle nose		ASA	A2-6			A2-8		
	Spindle bearing diameter (Front)		mm (inch)	110 (4.3)			130 (5.1)		
	Spindle through hole		mm (inch)	76 (3.0)			91 (3.6)		
	Min. spindle indexing angle (C1-axis)		deg	0.0001					
Right spindle	Max. spindle speed		r/min	-	5000		-	5000	
	Spindle motor power (S3 25%/cont.)		kW	-	22 / 22 / 18.5 / 15		-	22 / 22 / 18.5 / 15	
	Spindle nose		ASA	-	A2-6		-	A2-6	
	Spindle bearing diameter (Front)		mm	-	110 (4.3)		-	110 (4.3)	
	Spindle through hole		mm	-	76 (3.0)		-	76 (3.0)	
	Min. spindle indexing angle (C2-axis)		deg	-	0.001{0.0001}		-	0.001{0.0001}	
Milling spindle	Max. spindle speed		r/min	12000					
	Milling spindle motor power (2.5min/10min/Cont.)		kW	22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)					
	Min. spindle indexing angle (B-axis)		deg.	0.0001					
Automatic tool changer	Tool storage capa. (Max.)		ea	40 {80,120}					
	Tool shank		-	CAPTO C6					
	Max. tool diameter continous		mm (inch)	90 (3.5)					
	Max. tool diameter without adjacent tools		mm (inch)	130 (5.1)					
	Max. tool length		mm (inch)	300 (11.8)					
	Max. tool weight		kg (lb)	12 (26.5)					
	Max. tool moment		N·m (ft-lbs)	9.8 (7.2)					
	Tool change time (T-T-T)		Tool-to-tool	sec	1.8				
	Chip-to-chip	sec	7.8						
Lower turret	No. of tool stations		ea	-	12{24 position index}		-	12{24 position index}	
	OD tool size		mm (inch)	-	25 (1.0)		-	25 (1.0)	
	Max. boring bar size		mm (inch)	-	Ø40 (Ø1.6)		-	Ø40 (Ø1.6)	
	Turret Indexing time (1 station swivel)		s	-	0.2		-	0.2	
	Max. rotary tool speed		r/min	-	{5000, 10000}		-	{5000, 10000}	
Long boring bar magazine (option for SMX 3100L/LS)	Tool storage capacity (Max.)		ea	-					
	Max. tool size		mm (inch)	-					
	Max. tool weight		kg (lb)	-					
Tail stock	Quill bore taper		MT	#4	-	#4	-		
	Quill travel		mm (inch)	1075 (42.3)	-	1075 (42.3)	-		
Coolant	Coolant pump motor power		kW (Hp)	1.1					
Power source	Electric power supply (rated capacity)		kVA	55.04	73.53	80.19	51.74	70.24	76.9
Machine dimensions	Height		mm (inch)	2777 (109.3)					
	Length		mm (inch)	3950 (155.5) (without Chip Conveyor), 4845 (190.7)					
	Width		mm (inch)	2770 (109.1) (without Chip Conveyor), 2770 (109.1)					
	Weight		kg (lb)	14900 (32848.4)	15200 (33509.8)	15800 (34832.5)	15000 (33068.9)	15300 (33730.2)	15900 (35053.0)
Control	NC system			Fanuc 31i plus{Fanuc 31i-5 plus / Siemens 840D / CUFOS}					

*{ }: Optimal

MACHINE SPECIFICATIONS

SMX 2600 series

Item			Unit	SMX 2600	SMX 2600S	SMX 2600ST
Capacity	Swing over bed		mm (inch)	660 (26.0)		
	Recom. turning diameter		mm (inch)	255 (10.0)		
	Max. turning diameter		mm (inch)	660 (26.0)		660 (26.0) [Lower turret : 405 (15.9)]
	Max. turning length		mm (inch)	1540 (60.6)		
	Chuck size	Left spindle	inch	10 {12}*		
		Right spindle	inch	-	10 {12}*	
	Chuck work weight (include chuck)		kg (lb)	260 (573.2)		
	Shaft work weight (include chuck)		kg (lb)	520 (1146.4)		
Travels	Bar working diameter		mm (inch)	81 (3.2)		
	Travel distance	X-axis	mm (inch)	630 (24.8)		695 (27.4)
		Y-axis	mm (inch)	300 (±150) (11.8 (±5.9))		
		Z-axis	mm (inch)	1585 (62.4)		
		A-axis**	mm (inch)	1562 (61.5)	1605 (63.2)	1540 (60.6)
		B-axis	deg	240 (±120)		
		C1-axis / C2-axis	deg	360 / 360		
		X2-axis / Z2-axis	mm (inch)	-	-	235 / 1540 (9.3 / 60.6)
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)		
		Y-axis	m/min (ipm)	36 (1417.3)		
		Z-axis	m/min (ipm)	48 (1889.8)		
		A-axis**	m/min (ipm)	-	30 (1181.1)	
		B-axis	r/min	40		
		C1-axis / C2-axis	r/min	200 / 200		
X2-axis / Z2-axis		m/min (ipm)	-	-	24 / 36 (944.9 / 1417.3)	
Left spindle	Max. spindle speed		r/min	4000		
	Spindle motor power (S3 25%/cont.)		kW (Hp)	30/26/22 (40.2/34./29.5) (S3 25% / S2 30min /S1 Cont.)		
	Spindle nose		ASA	A2-8		
	Spindle bearing diameter (Front)		mm (inch)	130 (5.1)		
	Spindle through hole		mm (inch)	91 (3.6)		
	Min. spindle indexing angle (C1-axis)		deg	0.0001		
Right spindle	Max. spindle speed		r/min	-	4000	
	Spindle motor power (S3 25%/cont.)		kW (Hp)	-	30/26/22 (40.2/34./29.5) (S3 25% / S2 30min /S1 Cont.)	
	Spindle nose		ASA	-	A2-8	
	Spindle bearing diameter (Front)		mm (inch)	-	130 (5.1)	
	Spindle through hole		mm (inch)	-	91 (3.6)	
	Min. spindle indexing angle (C2-axis)		deg	-	0.001	
Milling spindle	Max. spindle speed		r/min	12000 {8000}*		
	Milling spindle motor power (2.5min/10min/ Cont.)		kW (Hp)	26/18.5/15 (34.9/24.8/20.1)		
	Min. spindle indexing angle (B-axis)		deg	0.0001		
Automatic tool changer	Tool storage capa. (Max.)		ea	40 {80/120}*		
	Tool shank		-	CAPTO C6 {HSK-T63}*		
	Max. tool diameter continous		mm (inch)	90 (3.5)		
	Max. tool diameter without adjacent tools		mm (inch)	130 (5.1)		
	Max. tool length		mm (inch)	450 (17.7)		
	Max. tool weight		kg (lb)	12 (26.5)		
	Max. tool moment		N · m (ft-lbs)	9.8 (7.2)		
	Tool change time (T-T-T)	Tool-to-tool	sec	1.8		
		Chip-to-chip	sec	7.8		
Lower turret	No. of tool stations		ea	-	12	
	OD tool size		mm (inch)	-	25 (1.0)	
	Max. boring bar size		mm (inch)	-	40 (1.6)	
	Turret Indexing time (1 station swivel)		s	-	0.2	
Long boring bar magazine (option for SMX 3100L/LS)	Max. rotary tool speed		r/min	-	5000	
	Tool storage capacity (Max.)		ea	-	-	
	Max. tool size		mm (inch)	-	-	
Tail stock	Max. tool weight		kg (lb)	-	-	
	Quill bore taper		MT	#5	-	-
	Quill travel		mm (inch)	1562 (61.5)	-	-
Coolant	Coolant pump motor power		kW (Hp)	2.2 (3.0)		
Power source	Electric power supply (rated capacity)		kVA	68.64	92.84	98.93
Machine dimensions	Height		mm (inch)	2750 (108.3)	2750 (108.3)	2820 (111.0)
	Length		mm (inch)	4900 (192.9)	4900 (192.9)	4900 (192.9)
	Width		mm (inch)	3011 (118.5)	3011 (118.5)	3021 (118.9)
	Weight		kg (lb)	15800 (34832.5)	16200 (35714.4)	18000 (39682.6)
Control	NC system		FANUC31i {FANUC31i-5 / SIEMENS 840D / CUFOS}* * { } : Optimal ** A-axis is travel of servo tail stock in PUMA SXM2600, 3100/L and travel of right spindle in SMX 2600S/ST, 3100S/ST/LS.			

SMX 3100 series

Item			Unit	SMX 3100	SMX 3100L	SMX 3100S	SMX 3100ST	SMX 3100LS	
Capacity	Swing over bed		mm (inch)			660 (26.0)			
	Recom. turning diameter		mm (inch)			315 (12.4)			
	Max. turning diameter		mm (inch)	660 (26.0)		660 (26.0) [Lower turret : 405 (15.9)]		660 (26.0)	
	Max. turning length		mm (inch)	1540 (60.6)	2540 (100.0)	1540 (60.6)		2540 (100.0)	
	Chuck size	Left spindle	inch	12 {15}*					
		Right spindle	inch	-	-	10 {12}*			
	Chuck work weight (include chuck)		kg (lb)	500 (1102.3)					
	Shaft work weight (include chuck)		kg (lb)	1000 (2204.6)					
Bar working diameter		mm (inch)	102 (4.0)						
Travels	Travel distance	X-axis	mm (inch)	630 (24.8)		695 (27.4)		630 (24.8)	
		Y-axis	mm (inch)						
		Z-axis	mm (inch)		2585 (101.8)	1585 (62.4)		2585 (101.8)	
		A-axis**	mm (inch)	1562 (61.5)	2500 (98.4)	1605 (63.2)	1540 (60.6)	2500 (98.4)	
		B-axis	deg						
		C1-axis / C2-axis	deg						
		X2-axis / Z2-axis	mm (inch)	-	-	-	235 / 1540 (9.3 / 60.6)		-
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)					
		Y-axis	m/min (ipm)	36 (1417.3)					
		Z-axis	m/min (ipm)	48 (1889.8)	30 (1181.1)	48 (1889.8)		30 (1181.1)	
		A-axis**	m/min (ipm)	-	-	30 (1181.1)			
		B-axis	r/min	40					
		C1-axis / C2-axis	r/min	200 / 200					
		X2-axis / Z2-axis	m/min (ipm)	-	-	-	24 / 36 (944.9 / 1417.3)		-
Left spindle	Max. spindle speed		r/min	3000					
	Spindle motor power		kW (Hp)	30/25 (40.2/33.5) (S2 30min/S1 Cont.)					
	Spindle nose		ASA	A2-11					
	Spindle bearing diameter (Front)		mm (inch)	160 (6.3)					
	Spindle through hole		mm (inch)	115 (4.5)					
	Min. spindle indexing angle (C1-axis)		deg	0.0001					
Right spindle	Max. spindle speed		r/min	-	-	4000			
	Spindle motor power		kW (Hp)	-	-	30/25 (40.2/33.5) (S2 30min/S1 Cont.)			
	Spindle nose		ASA	-	-	A2-8			
	Spindle bearing diameter (Front)		mm (inch)	-	-	130 (5.1)			
	Spindle through hole		mm (inch)	-	-	91 (3.6)			
	Min. spindle indexing angle (C2-axis)		deg	-	-	0.001			
Milling spindle	Max. spindle speed		r/min	12000 {8000}*					
	Milling spindle motor power (2.5min/10min/Cont.)		kW (Hp)	26/18.5/15 (34.9/24.8/20.1)					
	Min. spindle indexing angle (B-axis)		deg						
Automatic tool changer	Tool storage capa. (Max.)		ea	40 {80/120}* CAPTO C6 {HSK-T63}* 90 (3.5)					
	Tool shank		-						
	Max. tool diameter continous		mm (inch)	130 (5.1)					
	Max. tool diameter without adjacent tools		mm (inch)	450 (17.7)					
	Max. tool length		mm (inch)	12 (26.5)					
	Max. tool weight		kg (lb)	9.8 (7.2)					
	Max. tool moment		N · m (ft-lbs)	1.8					
Lower turret	Tool change	Tool-to-tool	sec	7.8					
	time (T-T-T)	Chip-to-chip	sec						
	No. of tool stations		ea	-		12		-	
	OD tool size		mm (inch)	-		25 (1.0)		-	
	Max. boring bar size		mm (inch)	-		40 (1.6)		-	
Long boring bar magazine (option for SMX 3100L/LS)	Turret Indexing time (1 station swivel)		s	-		0.2		-	
	Max. rotary tool speed		r/min	-		5000		-	
	Tool storage capacity (Max.)		ea	-	{3}*	-		{3}*	
	Max. tool size		mm (inch)	-	{Ø60 x L600 or Ø30 x L800 (Ø2.4 x L23.6 or Ø1.2 x L31.5))*	-		{Ø60 x L600 or Ø30 x L800 (Ø2.4 x L23.6 or Ø1.2 x L31.5))*	
	Max. tool weight		kg (lb)	-	{15}*	-		{15}*	
Tail Stock	Quill bore taper		MT	#5		-			
	Quill travel		mm (inch)	1562 (61.5)	2500 (98.4)	-			
Coolant	Coolant pump motor power		kW (Hp)	2.2 (3.0)					
Power source	Electric power supply (rated capacity)		kVA	69.78	69.80	99.44	99.46	99.72	
Machine dimensions	Height		mm (inch)	2750 (108.3)	2850 (112.2)	2850 (112.2)	2820 (111.0)	2850 (112.2)	
	Length		mm (inch)	4900 (192.9)	6400 (252.0)	4900 (192.9)	4900 (192.9)	6400 (252.0)	
	Width		mm (inch)	3011 (118.5)	3011 (118.5)	3011 (118.5)	3021 (118.9)	3011 (118.5)	
	Weight		kg (lb)	16300 (35934.8)	20100 (44312.3)	16700 (36816.7)	18500 (40784.9)	20500 (45194.1)	
Control	NC system		FANUC 31i (FANUC 31i-5 / SIEMENS 840D / CUFOS)*						

*{ } : Optimal ** A-axis is travel of servo tail stock in PUMA SXM2600, 3100/L and travel of right spindle in SMX 2600S/ST, 3100S/ST/LS.

The DN Solutions promise, MACHINE GREATNESS, has two important meanings. The first is simple: DN Solutions makes great machines. The second is a challenge to our end-users. With a product line that is this comprehensive, accurate and reliable, we equip our customers to machine greatness. **The big question: *Why should you choose DN Solutions over other options?***

Here's why...



MACHINE GREATNESS™



WHAT YOU MAKE AND HOW YOU MAKE IT MATTERS—SO MAKE IT
GREAT WITH DN SOLUTIONS.

UNBEATABLE MACHINES

You won't find a more comprehensive range or a better combination of value, performance and reliability anywhere else.

ROBUST PRODUCT LINE

We offer an impressive range of machine models and hundreds of configurations. Whatever your machining needs and requirements, there's a DN Solutions for you.

READILY AVAILABLE - ANYWHERE IN THE WORLD

Machining centres (including 5-axis machines), lathes, multi-tasking turning centres and mill-turn machines, and horizontal borers with best-in-class specifications are all available...ready to install.

EXPERT SERVICE

Our dedicated, experienced and knowledgeable team is totally committed to improving your productivity, growth and success.

RESPONDING TO CUSTOMERS ANYTIME, ANYWHERE

DN Solutions Global Network

DN Solutions provides systems-based professional support services, before and after the machine tool sale, by responding quickly and efficiently to customers. By supplying spare parts, product training, field service and technical support, we provide the expert care, attention and assistance our customers expect from a market leader.

Global sales and service support network		51	Technical centers Technical center, Sales support, Service support, Parts support
4	Corporations	200	Service posts
156	Dealer networks	3	Factories



CUSTOMER SUPPORT AND SERVICES

We're there for you whenever you need us.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.



Field services

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service



Parts supply

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



Training

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



Technical support

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



dn-solutions.com

Head Office

22F T Tower, 30, Sowol-ro 2-gil
Jung-gu, Seoul, Korea, 04637
Tel: +82-2-6972-0370/0350
Fax: +82-2-6972-0400

DN Solutions America

19A Chapin Road, Pine Brook
New Jersey 07058, United States
Tel: +1-973-618-2500
Fax: +1-973-618-2501

DN Solutions Europe

Emdener Strasse 24, D-41540
Dormagen, Germany
Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions India

No.82, Jakkuar Village
Yelahanka Hobli, Bangalore-560064
Tel: + 91-80-2205-6900
E-mail: india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhuang
Highway No.258 Songjiang District
China Shanghai (201612)
Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

Sales inquiry

sales@dncompany.com

* For more details, please contact DN Solutions.

* Specifications and information contained within this catalogue may be changed without prior notice.